

Typical Characteristics

- Fixed voltage input, isolated unregulated output, 1W power
- Isolation voltage 3000VDC/1min
- Low no-load power consumption: 0.025W(Typ.)
- Working ambient temperature: -40℃~+85℃
- Efficiency: up to 83%
- Output short-circuit protection: continuous short-circuit protection, automatic recovery
- Industry standard pin-out
- Compact SIP package
- Low ripple/noise (20MHz bandwidth): 50mVp-p(typ.)
- MTBF≥3.5 million hours (3500000Hrs)

1W, fixed-voltage input, isolated unregulated single-output DC-DC power module



Over-temperature protection and continuous output short-circuit protection
RoHS

F_N-1WR3 Series—is a compact, high-efficiency, low-power, fixed-input-voltage, isolated, unregulated single-output DC/DC module power supply designed by Huizhi Electronics for its customers;

This product series is specifically designed for applications in on-board power supply systems that require the generation of a voltage isolated from the input power source.

This product is suitable for:

- Applications where the input power supply voltage is relatively stable (voltage variation range: $\pm 10\%$ Vin);
- Applications requiring isolation between input and output (isolation voltage ≤ 3000 VDC);
- Applications with low requirements for output voltage stability;
- Typical applications: purely digital circuits, general-purpose low-frequency analog circuits, relay driver circuits, data switching circuits, etc.

Model Number Description

F	xx	xx	N-1	W	R3	
						Suffix (3rd-generation product)
						Rated output power (1W)
						Package type (Dual In-line Package, DIP)
						Output voltage (rated)
						Input voltage (rated)
						Product series (3000V isolated single output)

Product selection table

Certification	Model number	Input voltage range (Vdc)	Output Voltage/Current		Ripple and Noise	Efficiency@ Full load	Max. capacitive
		Rated value ^② (Range)	Output V (Vdc)	Output I (mA) (Max. Min.)	Full Load (mVp-p) Typ. /Max.	% (Min. / Typ.)	μF
	F0303N-1WR3	3.3 (2.97-3.63)	3.3	303/30	50/100	75/79	2400
	F0305N-1WR3		5	200/20	50/100	78/82	2400
	F0312N-1WR3		12	84/9	50/150	80/83	560
	F0503N-1WR3	5 (4.5-5.5)	3.3	303/30	50/100	70/74	2400
	F0505N-W5R3		5	100/20	50/100	73/76	2400
	F0505N-1WR3		5	200/20	50/100	78/82	2400

	F0509N-1WR3		9	111/12	50/100	79/83	1000
	F0512N-1WR3		12	84/9	50/100	79/83	560
	F0515N-1WR3		15	67/7	100/150	79/83	560
	F0524N-1WR3		24	42/4	100/200	81/85	220
	F1203N-1WR3	12 (10.8-13.2)	3.3	303/30	50/100	71/75	2400
	F1205N-1WR3		5	200/20	50/100	76/80	2400
	F1209N-1WR3		9	111/12	50/100	74/78	1000
	F1212N-1WR3		12	84/9	50/100	76/80	560
	F1215N-1WR3		15	67/7	50/100	77/81	560
	F1224N-1WR3		24	42/4	50/100	77/81	220
	F1503N-1WR3	15 (13.5-16.5)	3.3	303/30	50/100	81/84	2400
	F1505N-1WR3		5	200/20	50/100	76/80	2400
	F1509N-1WR3		9	111/12	50/100	76/80	1200
	F1512N-1WR3		12	84/9	50/100	77/81	560
	F1515N-1WR3		15	67/7	50/100	77/81	560
	F1524N-1WR3		24	42/4	50/100	77/81	220
	F2403N-1WR3	24 (21.6-26.4)	3.3	303/30	50/100	69/75	2400
	F2405N-1WR3		5	200/20	50/100	73/79	2400
	F2409N-1WR3		9	111/12	50/100	74/80	1000
	F2412N-1WR3		12	84/9	50/100	75/81	560
	F2415N-1WR3		15	67/7	50/100	75/81	560
	F2424N-1WR3		24	42/4	50/100	75/81	220

Note: 1. Due to space limitations, the above is only a list of typical products. If you require products not included in this list, please contact our sales department.

2. The maximum capacitive load indicates the maximum capacitive load that can be connected to +Vo or -Vo. If this value is exceeded, the product will not start properly.

Test Conditions: Unless otherwise specified, all parameter measurements were taken at the nominal input voltage, with a purely resistive rated load, and at an ambient temperature of 25° C.

Input characteristics

Items	Working conditions	Min.	Typ.	Max.	Unit
Input Current (Full Load/No Load)	3.3VNC input series	--	370/12	389/--	mA
	5VNC input series	--	241/8	254/--	
	12VNC input series	--	105/8	110/--	
	15VNC input series	--	83/8	88/--	
	24VNC input series	--	52/8	57/--	
Reflected ripple current		--	15	--	
Impulse voltage (I sec. max)	3.3VNC input series	-0.7	--	5	VNC
	5VNC input series	-0.7	--	9	
	12VNC input series	-0.7	--	18	
	15VNC input series	-0.7	--	21	

	24VNC input series	-0.7	--	30	
Input filter type		Capacitor filtering			
Hot swap		Not supported			

Output characteristics


Items	Working and test conditions		Min.	Typ.	Max.	Unit
Output load	Load percentage		10	--	100	%
Output voltage accuracy	See the error envelope curve		--	--	±15.0	%
Line Regulation	Input voltage variation: ±1%	3.3V output	--	--	±1.5	%
		Others	--	--	±1.2	%
Load Regulation	10%~100% load	3.3VDC output	--	11	15	%
		5VDC output	--	10	15	%
		9VDC output	--	8	10	%
		12VDC output	--	7	10	%
		15VDC output	--	6	10	%
		24VDC output	--	5	10	%
Ripple & Noise	Pure resistive load, 20 MHz bandwidth, peak-to-peak value		--	50	-	mVp-p
Temperature drift coefficient	Full load		--	--	±0.03	%/°C
Output short-circuit protection	Sustainable short-circuit protection, automatic recovery					

Note: ① Test method for ripple and noise: twisted-pair test method.

General characteristics

Items	Working conditions	Min.	Typ.	Max.	Unit
Insulation voltage	Input-output, test duration: 1 minute, leakage current less than 1 mA.	3000	--	--	VNC
Insulation resistance	Input-output, insulation voltage 500 VDC.	1000	--	--	MΩ
Isolation capacitor	Input-Output, 100 kHz/0.1 V	--	20	--	pF
Operating temperature	Use the reference temperature derating curve	-40	--	+85	°C
Storage temperature		-40	--	+125	
Maximum operating case temperature		--	25	--	
Storage humidity	No condensation	5	--	95	%RH
Pin soldering temperature resistance	The solder joint is 1.5 mm from the housing; 10 seconds	--	--	+300	°C
Switching frequency	Full load, rated voltage input	--	100	--	KHz
Vibration		10-55Hz, 10G, 30 Min. along X, Y and Z			
Housing material		Black flame-retardant, heat-resistant plastic (UL94 V-0)			
Minimum mean time between failures	MIL-HNFK-217F@25°C	3.5X10 ⁶	--	--	Hrs

Product Performance Curve

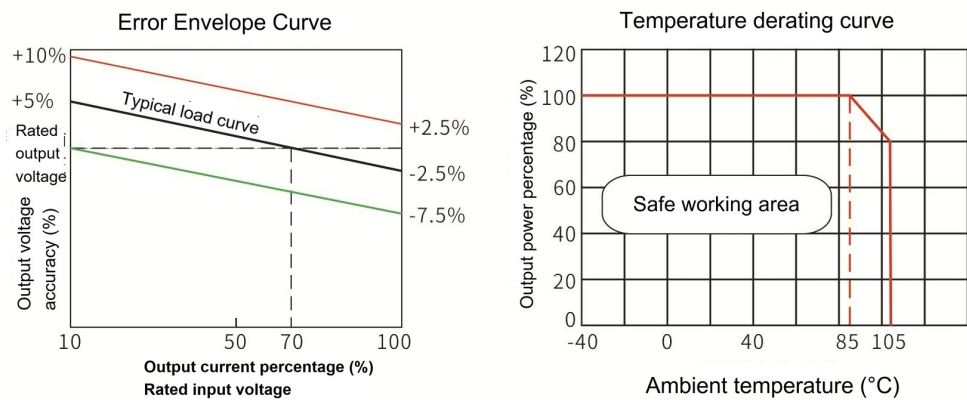

Typical Application Reference Circuit (Recommended Parameters)

1. General applications:



图(1)


If further reduction of input and output ripple is required, a capacitor filter network can be connected across the input and output terminals; the circuit is shown in Figure 1.

However, care must be taken to select an appropriate filter capacitor. If the capacitor is too large, it is likely to cause startup issues. For each output channel, the recommended capacitive load values—which ensure safe and reliable operation—are listed in Table 1.

Recommended capacitive load values (Table 1)

Vin (VDC)	Cin (u)	Vo (VDC)	Cout (u F)
3.3/5	4.7	3.3/5	10
12	2.2	9	4.7
15	2.2	12	2.2
24	1	15	1
—	—	24	1

2. Typical EMI application circuits

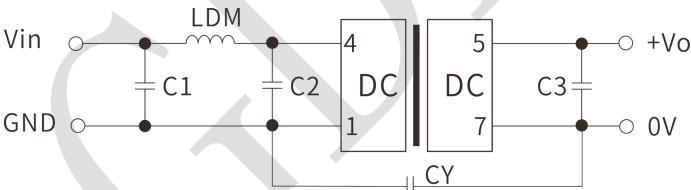

图(2)


Recommended EMI reference circuit values (Table 2)

Vin (VDC)	3.3/5/12/15/24
C1/C2	4.7u F/50V
C3	See Cout in Table 1
LDM	4.7uH
CY	270pF/2KVNC

3. Output load requirements

To ensure that this module operates efficiently and reliably, the minimum output load must not be less than 10% of the rated load during use. If your power requirement is indeed very low, please connect a resistor in parallel between the positive and negative terminals of the output (the total power rating of the resistor must be greater than or equal to 10% of the rated power, and the selected resistor's power rating must be at least 5 times greater than the actual power consumption; otherwise, the resistor will become excessively hot).

1) Appearance Dimensions (Unit: mm, Tol.: ± 0.25) 2) Pin Assignment

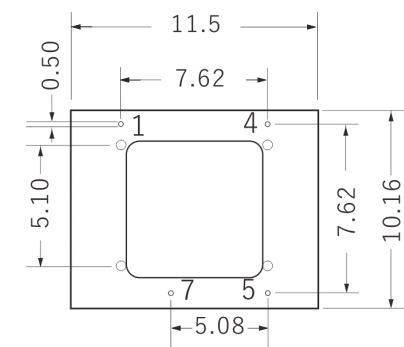


1	4	5	7
GND	V _{in}	+V _o	0V
Input ground	+ Input	+ Output	Output ground

☒Note: grid distance : 2.54*2.54mm

Package code	L x W x H	
N	12.7 x 8.2 x 10.16mm	0.500 x 0.323 x 0.400inch

Connect the power supply input to the power source. Connect the power supply output to the electronic load via the fixture board. For testing, use a $30\text{ cm} \pm 2\text{ cm}$ sampling lead to take a direct sample from the power supply output port. Select insulated wires with appropriate gauge based on the magnitude of the output current.

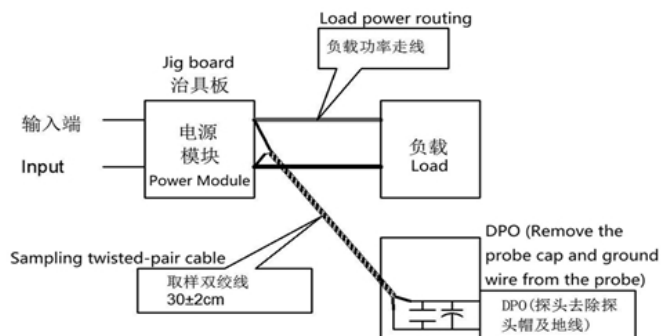

Application Precautions

1. Input Requirements: Ensure that the output voltage fluctuation range of the power supply does not exceed the input requirements of the NC/NC module itself; the output power of the input power supply must be greater than the output power of the NC/NC module.
2. Recommended Circuit 1: For applications with general ripple and noise requirements, a filter capacitor can be connected in parallel at both the input and output terminals. The external circuit is shown in Figure (1) below; refer to Table (1). Output Load Requirements: Avoid operating under no-load conditions whenever possible. When the actual power consumption of the load is less than 10% of the module's rated output power or no-load conditions occur, it is recommended to connect a dummy load to the output. The dummy load (resistor) can be calculated based on 5-10% of the module's rated power, where the resistance value = $U_{out} / (1W \times R3 \times 10\%)$;
3. Overload Protection: Under normal operating conditions, the product's output circuit does not provide overload protection. Prolonged overload will trigger over-temperature protection, causing the output to shut down;
4. The output features continuous short-circuit protection with automatic recovery.
5. The capacitance of the external capacitor connected to the output should not be too large, as this may cause overcurrent or poor startup during module startup;
6. If the product operates below the minimum required load, performance compliance with all specifications in this manual cannot be guaranteed;
7. Maximum capacitive loads are tested within the input voltage range and under full-load conditions;
8. Unless otherwise specified, all specifications in this manual are measured at $T_a=25^{\circ}C$, humidity $<75\%RH$, nominal input voltage, and rated output load;
9. All test methods for the specifications in this manual are based on our company's standards;
10. We offer product customization; please contact our technical staff directly for details;
11. Product specifications are subject to change without notice.

Contact

GNHUIZHI®

广东汇智电子技术有限公司

GuangNong Huizhi Electronic Technology Co.,LtdN.

地址：广东省肇庆市端州区 11 区肇庆大道北侧厂房、办公楼(二期)3 楼

Add.: 3rd floor, factory and office building (phase II) on the north side of Zhaoqing Avenue,
District 11, Duanzhou District, Zhaoqing City, Guangdong Province, China

Homepage: www.huizhi-elec.com/www.chinaebizal.com

Tel: +86 - 758 - 2566 585

E-mail: sales@huizhi-elec.com

GDHUIZHI