

Typical Characteristics

- Fixed-voltage input, isolated regulated output, 2W power
- Isolation voltage: 6000VDC
- Low no-load power consumption: 0.025W(Typ.)
- Efficiency: up to 82%
- Working ambient temperature: -40℃~+85℃
- MTBF≥3.5 million hours (3500000Hrs)
- Output short-circuit protection: continuous short-circuit protection, automatic recovery
- Compact SIP package, plastic housing
- Industry standard pin-out
- Ripple/noise (20MHz bandwidth): 30mVp-p(Typ.)

IH_S-2WR3 Series is a compact, high-efficiency, low-power, fixed-input-voltage, isolated, single-output DC/DC power module designed by Huizhi Electronics for its customers;

This product series is specifically designed for applications in on-board power supply systems that require the generation of a voltage isolated from the input power source.

This product is suitable for:


- Applications where the input voltage is relatively stable (voltage variation range: $\pm 5\% V_{in}$);
- Applications requiring isolation between input and output (isolation voltage ≤ 6000 VDC);
- Applications with high requirements for output voltage stability and low output ripple and noise;
- Typical applications: pure digital circuits, general low-frequency analog circuits, relay driver circuits, data switching circuits, etc.

2W, fixed voltage input, isolated, regulated single-output DC/DC power module



Over-temperature protection & continuous
output short-circuit protection
RoHS

Model Number Description

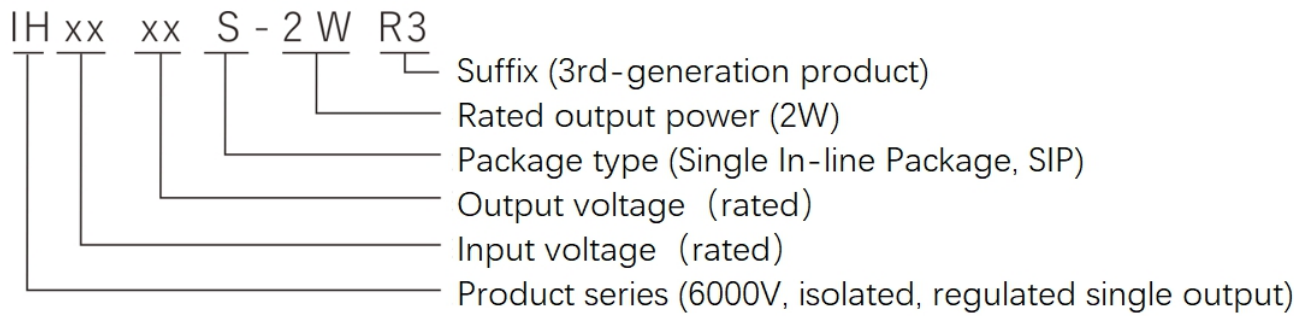

Product selection table

Cer tif ica tio n	Model number	Input voltage range (Vdc)	Output Voltage/Current		Ripple and Noise	Efficiency@ Full load	Max. capaci tive load
		Rated value ^② (Range)	Output V (Vdc)	Output I (mA) (Max. Min.)	Full Load (mVp-p) Typ. /Max.	% (Min. / Typ.)	μ F

	IH0303S-2WR3	3.3 (3.135-3.465)	3.3	400/40	50/100	68/72	2400
	IH0305S-2WR3		5	400/40	50/100	68/72	2400
	IH0309S-2WR3		9	222/22	50/100	68/72	2400
	IH0503S-2WR3	5 (4.75-5.25)	3.3	400/40	50/100	70/74	2400
	IH0505S-2WR3		5	400/40	50/100	70/74	2400
	IH0509S-2WR3		9	222/10	50/100	70/74	1200
	IH0512S-2WR3		12	166/16	50/100	70/74	560
	IH0515S-2WR3		15	133/13	50/100	70/74	560
	IH0524S-2WR3		24	83/8	100/200	70/74	100
	IH0903S-2WR3	9 (8.55-9.45)	3.3	400/40	50/100	70/74	2400
	IH0905S-2WR3		5	400/40	50/100	70/74	2400
	IH0909S-2WR3		9	222/22	50/100	70/74	560
	IH0912S-2WR3		12	167/16	50/100	70/74	560
	IH0915S-2WR3		15	133/13	50/100	70/74	220
	IH0924S-2WR3		24	83/13	50/100	70/74	100
	IH1203S-2WR3	12 (11.4-12.6)	3.3	400/40	50/100	70/74	2400
	IH1205S-2WR3		5	400/40	50/100	70/74	2400
	IH1209S-2WR3		9	222/22	50/100	70/74	560
	IH1212S-2WR3		12	167/16	50/100	70/74	560
	IH1215S-2WR3		15	133/13	50/100	70/74	220
	IH1224S-2WR3		24	83/13	50/100	70/74	100
	IH1503S-2WR3	15 (14.25-15.75)	3.3	400/40	50/100	70/74	2400
	IH1505S-2WR3		5	400/40	50/100	70/74	2400
	IH1509S-2WR3		9	222/22	50/100	70/74	560
	IH1512S-2WR3		12	167/16	50/100	70/74	560
	IH1515S-2WR3		15	133/13	50/100	70/74	220
	IH1524S-2WR3		24	83/13	50/100	70/74	100
	IH2403S-2WR3	24 (22.8-25.2)	3.3	400/40	50/100	70/74	2400
	IH2405S-2WR3		5	400/40	50/100	70/74	2400
	IH2409S-2WR3		9	222/22	50/100	70/74	560
	IH2412S-2WR3		12	167/16	50/100	70/74	560
	IH2415S-2WR3		15	133/13	50/100	70/74	220
	IH2424S-2WR3		24	83/13	50/100	70/74	100

Note: 1. Due to space limitations, the above is only a list of representative products. For products not included in this list, please contact our Sales Department.

2. The maximum capacitive load indicates the maximum capacitive load that can be connected to +Vo or -Vo. If this value is exceeded, the product will not start properly.

Test Conditions: Unless otherwise specified, all parameter measurements were taken at the nominal input voltage, with a purely resistive rated load, and at an ambient temperature of 25° C.

Input characteristics

Items	Working conditions	Min.	Typ.	Max.	Unit
Input Current (Full Load/No Load)	3.3VDC input series	--	820/15	--/35	mA
	5VDC input series	--	540/15	--/35	
	9VDC input series	---	300/10	--/25	
	12VDC input series	--	226/10	--/25	
	15VDC input series	--	180/10	--/25	
	24VDC input series	--	132/8	--/15	
Reflected ripple current		--	15	--	
Impulse voltage (I sec. max)	3.3V/5VDC input series	-0.7	--	9	VDC
	9V/12VDC/15 input series	-0.7	--	18	
	24VDC input series	-0.7	--	30	
Input filter type		Capacitor filtering			
Hot swap		Not supported			

Output characteristics

Items	Operating and test conditions	Min.	Typ.	Max.	Unit
Output load	Load percentage	10	--	100	%
Output voltage accuracy		--	--	±3.0	%
Line Regulation	Input voltage variation: ±1%	--	--	±0.25	%
Load Regulation	10%~100% load	--	±1	±2	%
Ripple & Noise	Pure resistive load, 20 MHz bandwidth, peak-to-peak value	--	30	80	mVp-p
Temperature drift coefficient	Full load	--	--	±0.03	%/° C
Output short-circuit protection		Sustainable short-circuit protection, automatic recovery			


Note: ① Test method for ripple and noise: Twisted-pair test method.

General characteristics

Items	Working conditions	Min.	Typ.	Max.	Unit
Insulation voltage	Input-output, test duration: 1 minute, leakage current less than 1 mA.	6000	--	--	VDC

Insulation resistance	Input-output, insulation voltage 500 VDC.	1000	--	--	MΩ
Isolation capacitor	Input-Output, 100 kHz/0.1 V	--	20	--	pF
Operating temperature	Use the reference temperature derating curve	-40	--	+85	℃
Storage temperature		-40	--	+125	
Maximum operating case temperature		--	25	--	
Storage humidity	No condensation	5	--	95	%RH
Pin soldering temperature resistance	The solder joint is 1.5 mm from the housing; 10 seconds	--	--	+300	℃
Switching frequency	Full load, rated voltage input	--	100	--	KHz
Vibration		10-55Hz, 10G, 30 Min. along X, Y and Z			
Housing material		Black flame-retardant, heat-resistant plastic (UL94 V-0)			
Minimum mean time between failures	MIL-HDBK-217F@25℃	3.5X10 ⁶	--	--	Hrs

Product Performance Curve

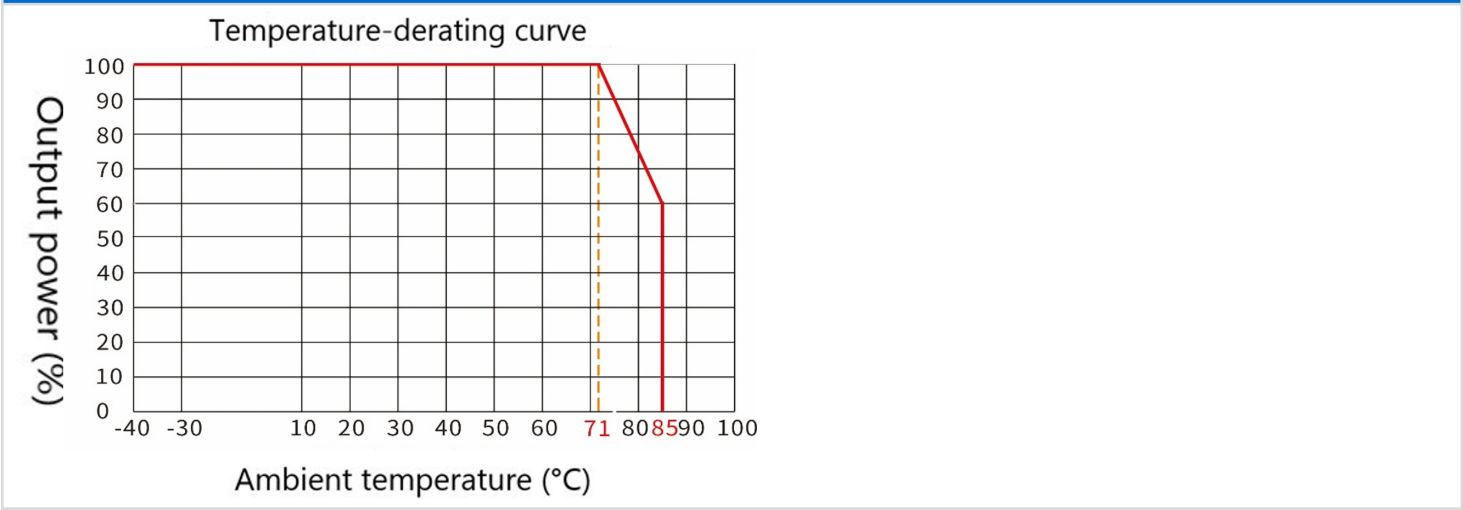


Typical Application Reference Circuit (Recommended Parameters)

1. General applications:

If further reduction of input and output ripple is required, a capacitor filter network can be connected across the input and output terminals; the circuit is shown in Figure 1.


However, care must be taken to select an appropriate filter capacitor. If the capacitor is too large, it is likely to cause startup issues. For each output channel, the recommended capacitive load values—which ensure safe and reliable operation—are listed in Table 1.

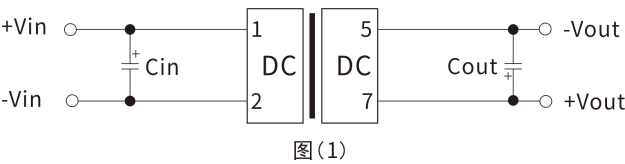

Recommended capacitive load values (Table 1)

Vin (Vdc)	Cin(u F)	Vo (Vdc)	Cout (u F)
3.3/5	4.7	3.3/5	10
9/12/15	2.2	9	4.7
24	1	12	2.2
—	—	15	1
—	—	24	1

2. Typical EMI application circuits

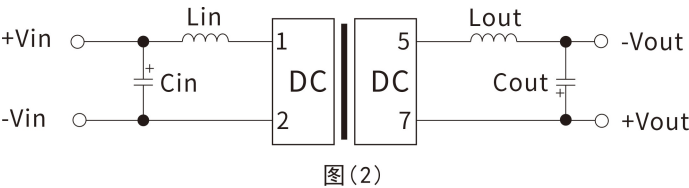


Recommended EMI reference circuit values (Table 2)

Vin (Vdc)	5/12/24
Cin	4.7u F/50V
Cout	See table 1
Lin	4.7uH
Lout	4.7uH

3. Output load requirements

To ensure that this module operates efficiently and reliably, the minimum output load must not be less than 10% of the rated load during use. If your power requirement is indeed very low, please connect a resistor in parallel between the positive and negative terminals of the output. (The total power dissipated by the resistor must be greater than or equal to 10% of the rated power, and the rated power of the resistor must be at least 5 times greater than the actual power drawn; otherwise, the resistor will become excessively hot.)

1) Appearance Dimensions (Unit: mm, Tol.: xx ±0.25)



3) Recommended layout




Diagram illustrating the test setup for measuring the power spectrum of a power module:

- Input端 (Input):** The input signal is connected to the **电源模块 (Power Module)**.
- 电源模块 (Power Module):** The power module is connected to the **负载 (Load)**.
- 负载功率走线 (Load power routing):** The power routing path from the power module to the load.
- 采样双绞线 (Sampling twisted-pair cable):** A cable with a length of $30 \pm 2\text{cm}$ is connected to the output of the power module.
- DPO (Remove the probe cap and ground wire from the probe):** The DPO probe is connected to the output of the power module, with the probe cap and ground wire removed.
- DPO (探头去除探头帽及地线):** The DPO probe is connected to the output of the power module, with the probe cap and ground wire removed.

Application Precautions

1. Input Requirements: Ensure that the output voltage fluctuation range of the power supply does not exceed the input requirements of the DC/DC module itself; the output power of the input power supply must be greater than the output power of the DC/DC module.
2. Recommended Circuit 1: For applications with general ripple and noise requirements, a filter capacitor can be connected in parallel at both the input and output terminals. The external circuit is shown in Figure (1) below; refer to Table (1). Output Load Requirements: Avoid operating under no-load conditions whenever possible. When the actual power consumption of the load is less than 10% of the module's rated output power or no-load conditions occur, it is recommended to connect a dummy load to the output. The dummy load (resistor) can be calculated based on 5-10% of the module's rated power, where the resistance value = $U_{out} / (1W \times R3 \times 10\%)$;
3. Overload Protection: Under normal operating conditions, the product's output circuit does not provide overload protection. Prolonged overload will trigger over-temperature protection, causing the output to shut down;
4. The output features continuous short-circuit protection with automatic recovery.
5. The capacitance of the external capacitor connected to the output should not be too large, as this may cause overcurrent or poor startup during module startup;
6. If the product operates below the minimum required load, performance compliance with all specifications in this manual cannot be guaranteed;
7. Maximum capacitive loads are tested within the input voltage range and under full-load conditions;
8. Unless otherwise specified, all specifications in this manual are measured at $T_a=25^{\circ}C$, humidity <75% RH, nominal input voltage, and rated output load;
9. All test methods for the specifications in this manual are based on our company's standards;
10. We offer product customization; please contact our technical or sales staff directly for details;
11. Product specifications are subject to change without notice.

Contact

GDHUIZHI®

广东汇智电子科技有限公司

Guangdong Huizhi Electronic Technology Co., Ltd.

地址：广东省肇庆市端州区 11 区肇庆大道北侧厂房、办公楼(二期)3 楼

Add.: 3rd floor, factory and office building (phase II) on the north side of Zhaoqing Avenue,
District 11, Duanzhou District, Zhaoqing City, Guangdong Province, China

Homepage: www.huizhi-elec.com/www.chinaebizal.com

Tel: +86 - 758 - 2566 585

E-mail: sales@huizhi-elec.com