


Typical Characteristics

- Fixed-voltage input, isolated regulated output, 2W power
- Isolation voltage: 3000VDC
- Low no-load power consumption: 0.025W(Typ.)
- Efficiency: up to 78%
- Working ambient temperature: -40℃~+85℃
- MTBF≥3.5 million hours (3500000Hrs)
- Output short-circuit protection: continuous short-circuit protection, automatic recovery
- Compact SIP package, plastic housing
- Industry standard pin-out
- Ripple/noise (20MHz bandwidth): 30mVp-p(Typ.)

2W, fixed voltage input, isolated, regulated single-output DC/DC power module

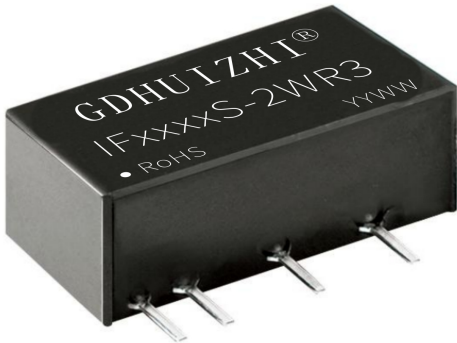

Over-temperature protection & continuous output short-circuit protection

RoHS

IF_S-2WR3 Series is a compact, high-efficiency, low-power, fixed-input-voltage, isolated, single-output DC/DC power module designed by Huizhi Electronics for its customers;

This product series is specifically designed for applications in on-board power supply systems that require the generation of a voltage isolated from the input power source.

This product is suitable for:

- Applications where the input voltage is relatively stable (voltage variation range: $\pm 5\%$ V_{in});
- Applications requiring isolation between input and output (isolation voltage ≤ 3000 VDC);
- Applications with high requirements for output voltage stability and low output ripple and noise;
- Typical applications: pure digital circuits, general low-frequency analog circuits, relay driver circuits, data switching circuits, etc.

Model Number Description

IF	xx	xx	S	-	2W	R3	
							Suffix (3rd-generation product)
							Rated output power (2W)
							Package type (Single In-line Package, SIP)
							Output voltage (rated)
							Input voltage (rated)
							Product series (1500V, isolated, regulated single output)

Product selection table

Cer tif ica tio n	Model number	Input voltage range (Vdc)	Output Voltage/Current		Ripple and Noise	Efficiency @ Full load	Max. capacitive load
		Rated value ^② (Range)	Output V (Vdc)	Output I (mA) (Max. Min.)	Full Load (mVp-p) Typ. /Max.	% (Min. / Typ.)	μ F

DC/DC Power Module
IF_S-2WR3 series

	IF0505S-2WR3	5 (4.75-5.25)	5	400/40	30/80	70/74	2400
	IF0512S-2WR3		12	150/15	30/80	73/77	560
	IF1205S-2WR3	12 (11.4~12.6)	5	400/40	30/80	70/74	2400
	IF1212S-2WR3		12	167/16	30/80	73/77	560
	IF1215S-2WR3		15	133/13	30/80	74/78	560
	IF2405S-2WR3	24 (22.8-25.2)	5	400/40	30/80	70/74	2400
	IF2412S-2WR3		12	167/16	30/80	73/77	560

Note: 1. Due to space limitations, the above is only a list of representative products. For products not included in this list, please contact our Sales Department.

2. The maximum capacitive load indicates the maximum capacitive load that can be connected to +Vo or -Vo. If this value is exceeded, the product will not start properly.

Test Conditions: Unless otherwise specified, all parameter measurements were taken at the nominal input voltage, with a purely resistive rated load, and at an ambient temperature of 25° C.

Input characteristics

Items	Working conditions	Min.	Typ.	Max.	Unit
Input Current (Full Load/No Load)	5VDC input series	--	270/5	--/10	mA
	12VDC input series	--	107/3	--/5	
	24VDC input series	--	53/1	--/2	
Reflected ripple current		--	15	--	
Impulse voltage (I sec. max)	5VDC input series	-0.7	--	9	VDC
	12VDC input series	-0.7	--	18	
	24VDC input series	-0.7	--	30	
Input filter type		Capacitor filtering			
Hot swap		Not supported			

Output characteristics


Items	Operating and test conditions	Min.	Typ.	Max.	Unit
Output load	Load percentage	10	--	100	%
Output voltage accuracy		--	--	±3.0	%
Line Regulation	Input voltage variation: ±1%	--	--	±0.25	%
Load Regulation	10%~100% load	--	±1	±2	%
Ripple & Noise	Pure resistive load, 20 MHz bandwidth, peak-to-peak value	--	30	80	mVp-p
Temperature drift coefficient	Full load	--	--	±0.03	%/° C
Output short-circuit protection		Sustainable short-circuit protection, automatic recovery			

Note: ① Test method for ripple and noise: Twisted-pair test method.

General characteristics

Items	Working conditions	Min.	Typ.	Max.	Unit
Insulation voltage	Input-output, test duration: 1 minute, leakage current less than 1 mA.	3000	--	--	VDC
Insulation resistance	Input-output, insulation voltage 500 VDC.	1000	--	--	MΩ
Isolation capacitor	Input-Output, 100 kHz/0.1 V	--	20	--	pF
Operating temperature	Use the reference temperature derating curve	-40	--	+85	℃
Storage temperature		-40	--	+125	
Maximum operating case temperature		--	25	--	
Storage humidity	No condensation	5	--	95	%RH
Pin soldering temperature resistance	The solder joint is 1.5 mm from the housing; 10 seconds	--	--	+300	℃
Switching frequency	Full load, rated voltage input	--	100	--	KHz
Vibration		10-55Hz, 10G, 30 Min. along X, Y and Z			
Housing material		Black flame-retardant, heat-resistant plastic (UL94 V-0)			
Minimum mean time between failures	MIL-HDBK-217F@25℃	3.5X10 ⁶	--	--	Hrs

Product Performance Curve

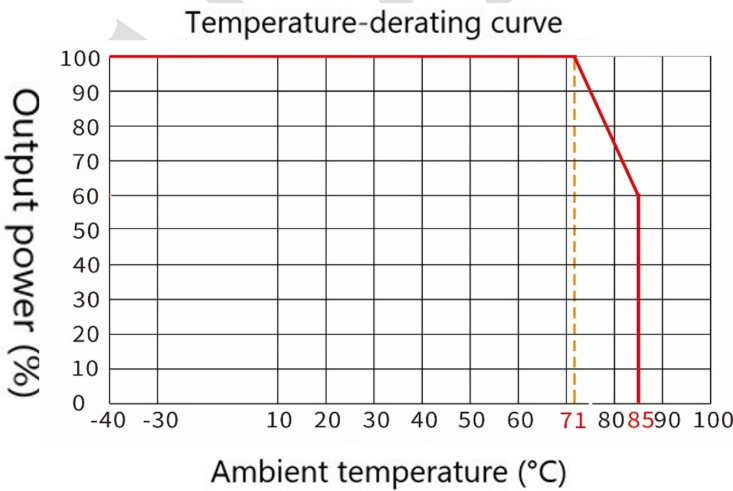


Typical Application Reference Circuit (Recommended Parameters)

1. General applications:

If further reduction of input and output ripple is required, a capacitor filter network can be connected across the input and output terminals; the circuit is shown in Figure 1.

However, care must be taken to select an appropriate filter capacitor. If the capacitor is too large, it is likely to cause startup issues. For each output channel, the recommended capacitive load values—which ensure safe and reliable operation—are listed in Table 1.

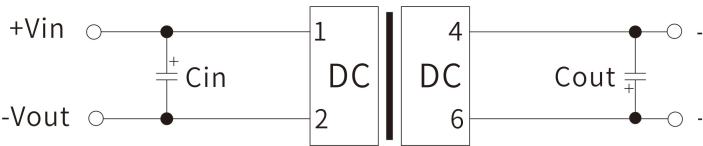


图(1)

Recommended capacitive load values (Table 1)

Vin (Vdc)	Cin (u F)	Vo (Vdc)	Cout (u F)
5	4.7	5	10
12	2.2	9	4.7
24	1	12	2.2
—	—	15	1

2. Typical EMI application circuits

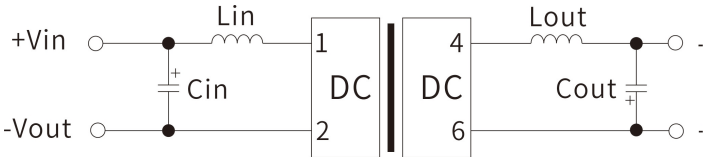

图(2)

Recommended EMI reference circuit values (Table 2)

Vin (Vdc)	5/12/24
Cin	4.7u F/50V
Cout	See table 1
Lin	4.7uH
Lout	4.7uH

3. Output load requirements

To ensure that this module operates efficiently and reliably, the minimum output load must not be less than 10% of the rated load during use. If your power requirement is indeed very low, please connect a resistor in parallel between the positive and negative terminals of the output (the total power rating of the resistor must be greater than or equal to 10% of the rated power, and the selected resistor's power rating must be at least five times greater than the actual power consumption; otherwise, the resistor will become excessively hot).

Application Precautions

1. Input Requirements: Ensure that the output voltage fluctuation range of the power supply does not exceed the input requirements of the DC/DC module itself; the output power of the input power supply must be greater than the output power of the DC/DC module.
2. Recommended Circuit 1: For applications with general ripple and noise requirements, a filter capacitor can be connected in parallel at both the input and output terminals. The external circuit is shown in Figure (1) below; refer to Table (1). Output Load Requirements: Avoid operating under no-load conditions whenever possible. When the actual power consumption of the load is less than 10% of the module's rated output power or no-load conditions occur, it is recommended to connect a dummy load to the output. The dummy load (resistor) can be calculated based on 5-10% of the module's rated power, where the resistance value = $U_{out} / (1W \times R3 \times 10\%)$;
3. Overload Protection: Under normal operating conditions, the product's output circuit does not provide overload protection. Prolonged overload will trigger over-temperature protection, causing the output to shut down;
4. The output features continuous short-circuit protection with automatic recovery.
5. The capacitance of the external capacitor connected to the output should not be too large, as this may cause overcurrent or poor startup during module startup;
6. If the product operates below the minimum required load, performance compliance with all specifications in this manual cannot be guaranteed;
7. Maximum capacitive loads are tested within the input voltage range and under full-load conditions;
8. Unless otherwise specified, all specifications in this manual are measured at $T_a=25^\circ\text{C}$, humidity $<75\%$ RH, nominal input voltage, and rated output load;
9. All test methods for the specifications in this manual are based on our company's standards;
10. We offer product customization; please contact our technical or sales staff directly for details;
11. Product specifications are subject to change without notice.

Contact

GDHUIZHI®

广东汇智电子科技有限公司

Guangdong Huizhi Electronic Technology Co., Ltd.

地址：广东省肇庆市端州区 11 区肇庆大道北侧厂房、办公楼(二期)3 楼

Add.: 3rd floor, factory and office building (phase II) on the north side of Zhaoqing Avenue,
District 11, Duanzhou District, Zhaoqing City, Guangdong Province, China

Homepage: www.huizhi-elec.com/www.chinaebizal.com

Tel: +86-758-2566 585

E-mail: sales@huizhi-elec.com