

Typical Characteristics

12W, wide-range input, isolated regulated single-output AC-DC power supply module

- Wide input range: 85-305VAC/100-432VDC
- No-load power consumption: 0.1W(Typ.)
- Conversion efficiency: 87%(Typ.)
- Switching frequency: 65KHz
- Protection types: Short-circuit, overcurrent, overload.
- Isolation voltage: 4000Vac
- Housing: Plastic, UL94V-0 compliant
- Plug-in mounting on the PCB board
- CE and RoHS compliant



RoHS

*The HAW12\_S-D2 Series is a compact, high-efficiency module power supply offered by Huizhi Electronics.*

*This series of power supplies offers a wide range of input voltages, AC/DC compatibility, low ripple, low temperature rise, low power consumption, high efficiency, high reliability, high safety isolation, and excellent EMC performance. The EMC and safety specifications comply with international standards EN55032 and IEC/EN61000. This series of products is widely used in various fields, including power, industrial, instrumentation, and smart home applications. When the product is used in environments with poor electromagnetic compatibility, please refer to the EMC application circuit provided by our company.*

Model Number Description



Product selection table

Certification	Model number	Output specifications					Maximum capacity sexual load	ripple and noise 20MHz (Max)	Efficiency @ full load, 220Vac (Typical)
		Power	Vol. 1	Current 1	Vol. 2	Current 2			
		(W)	Vo1 (V)	Io1 (m A)	Vo2 (V)	Io2 (m A)			
	HAW12-220S05D2	12	5	2400	-	-	2000	80	83
	HAW12-220S09D2	12	9	1333	-	-	2000	80	85
	HAW12-220S12D2	12	12	1000	-	-	1000	80	86
	HAW12-220S15D2	12	15	800	-	-	1000	80	86
	HAW12-220S24D2	12	24	500	-	-	470	80	87

Note 1: Due to space limitations, the above is only a partial list of products. For products not included in the list, please contact our Sales Department.

Note 2: “\*” indicates models currently under development.

Note 3: Typical output efficiency values are based on measurements taken after the product has been aged under full load for 30 minutes.

Note 4: The full-load efficiency (% , TYP) in the table has a tolerance of  $\pm 2\%$ . Full-load efficiency is calculated as the total output power divided by the module's input power.

### Input characteristics

Items	Working conditions	Minimum	Typical	Maximum	Unit
Input voltage range	AC input	85	220	305	VAC
	DC input	100	310	432	VDC
Input frequency range	-	47	50	63	Hz
Input current	115VAC	/	/	0.25	A
	220VAC	/	/	0.15	
Surge current	115VAC	/	/	10	
	220VAC	/	/	20	
Leakage current	-	0.5mA TYP/230VAC/50Hz			
External insurance	-	2A-4A/250VAC slow-break fuse			
Hot-swappable	-	Not supported			
Remote control	-	There is no remote control			

### Output characteristics

Items	Working conditions	Minimum		Typical	Maximum	Unit
Voltage accuracy	Input full voltage range Any load	Vo1	-	$\pm 1.0$	$\pm 2.0$	%
		Vo2	-	$\pm 3.0$	$\pm 5.0$	%
Linear adjustment rate	Rated load	Vo1	-	-	$\pm 0.5$	%
		Vo2	-	-	$\pm 1.5$	%
Load regulation	Input nominal voltage 20%~100% load	Vo1	-	-	$\pm 1.0$	%
		Vo2	-	-	$\pm 3.0$	%
No-load power consumption	Input 115VAC	-	-	-	0.1	W
	Input 220VAC	-	-	-		
Minimum load	Single output	0	-	-	-	%
	Positive and negative dual co-ground output	-	-	-	10	%
	Positive and negative dual isolated outputs	-	-	-	10	

Startup delay time	Input rated Voltage (Full Load)	-	1000	-	mS
Power down hold time	Input 115VAC (full load)		10		mS
	Input 220VAC (full load)	--	60	-	
Dynamic response	25%~50%~25% 50%~75%~50%	Overshoot amplitude (%): $\leq \pm 5.0$			%
		Recovery time (mS): $\leq 5.0$			mS
Output overshoot	Input full voltage range	$\leq 10\%V_o$			%
Short-circuit protection		It can be short-circuited for a long time and self-recovering			Barrier type
Drift coefficient	-	-	$\pm 0.03\%$	-	%/°C
Overcurrent protection	Input full voltage range	$\geq 130\% I_o$ is self-recoverable			Barrier type
Ripple Noise	-	-	50	100	mV
	Note: The test method for ripple and noise uses the twisted-pair test method. For specific test procedures and equipment requirements, please refer to the section below (Ripple & Noise Test Instructions).				


### General characteristics

Items	Working conditions	Minimum	Typical	Maximum	Unit
Switching frequency	-	-	65	-	KHz
Operating temperature	-	-25	-	+75	°C
Storage temperature	-	-40	-	+85	
Soldering temperature	Wave soldering	$260 \pm 4^\circ\text{C}$ , time: 5-10S			
	Hand soldering	$360 \pm 8^\circ\text{C}$ , interval 4-7S			
Relative humidity	-	10	-	90	%RH
Isolation voltage	Input-output, test for 1 minute, leakage current $\leq 5\text{mA}$	4000	-		VAC
Insulation resistance	Input-output @ apply DC500V	100	-		MΩ
Safety standards	-	EN60950、IEC60950			
Vibration	-	10-55Hz, 10G, 30Min, along X, Y, Z			
Safety level	-	CLASS II			
Enclosure grade	-	UL94V-0			
Mean time between failures MTBF	-	MIL-HDBK-217F@25°C > 300,000H			

EMC Electromagnetic Compatibility Characteristics

Total Project	Sub-projects	Testing standards	Judgment grade
EMC	EMI	Conducted Emission	CISPR22/EN55032 CLASS B (See Figure 3 for the recommended circuit)
		Radiated Emission	CISPR22/EN55032 CLASS B (See Figure 3 for the recommended circuit)
	EMS	Radiation Immunity	IEC/EN61000-4-3 10V/m Perf. Criteria B (See Figure 3 for the recommended circuit)
		Conducted Susceptibility	IEC/EN61000-4-6 3Vr. m. s Perf. Criteria B (See Figure 3 for the recommended circuit)
		Electrostatic Discharge	IEC/EN61000-4-2 Contact ± 6KV / Air ± 8KV Perf. Criteria B
		Surge Immunity	IEC/EN61000-4-5 ±1KV Perf. Criteria B (See Figure 3 for the recommended circuit)
		Electrical Fast Transient (EFT) Immunity	IEC/EN61000-4-4 ±2KV Perf. Criteria B (See Figure 3 for the recommended circuit) ±4KV Perf. Criteria B (See Figure 3 for the recommended circuit)
		Immunity to Voltage Sag and Transient, Short Interruption	IEC/EN61000-4-11 0%~70% Perf. Criteria B

Package Dimensions

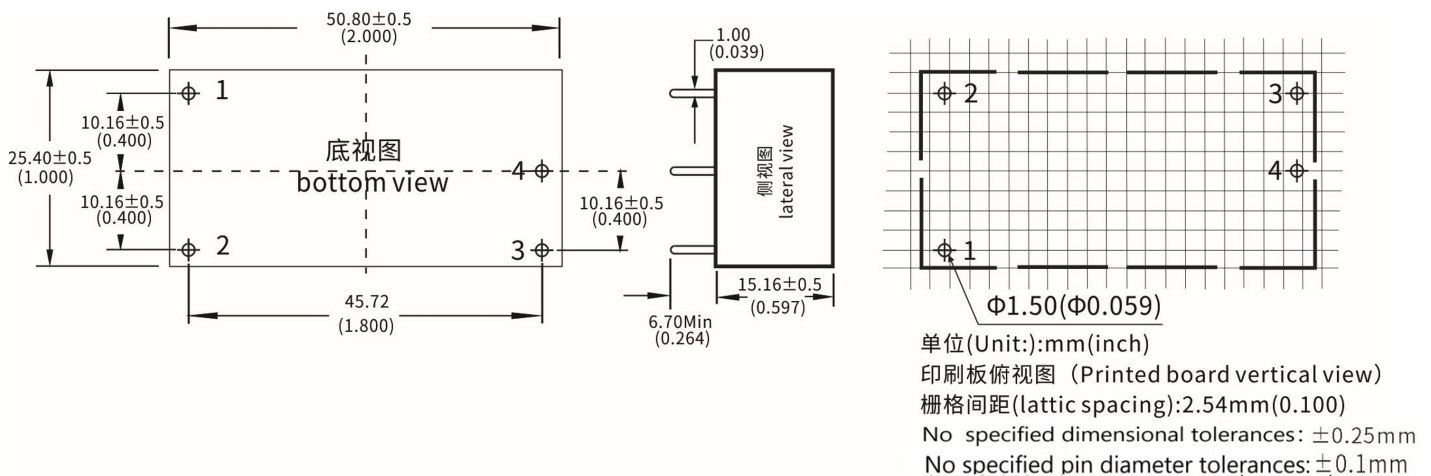

Package code	L x W x H	
D2	50.8.0 x25.4 x 15.16 mm	2.000 × 1.000 × 0.597inch

Pin Definitions

Pin	1	2	3	4
Single (S)	AC(N)	AC(L)	+Vo	-Vo
	Input neutral wire	Input wire	Output positive terminal	Output ground

Note: If the pin definitions of the power module differ from those in the selection guide, refer to the labels on the actual unit.


Ripple & Noise Test Instructions (Twisted Pair Method 20MHz Bandwidth)

Test Method:



1. For ripple and noise testing, use a Category 12 twisted-pair cable. Set the oscilloscope bandwidth to 20 MHz and use a 100 MHz bandwidth probe. Connect a 0.1 μF polypropylene capacitor and a 10 μF high-frequency, low-impedance electrolytic capacitor in parallel at the probe tip. Set the oscilloscope to “Sample” mode.

2. Output Ripple Noise Test Diagram:

Connect the power supply input to the input power source. Connect the power supply output to the electronic load via the fixture board. For testing, use a 30 cm ± 2 cm sampling lead to take a direct sample from the power supply output port. Select insulated wires with appropriate gauge based on the magnitude of the output current.

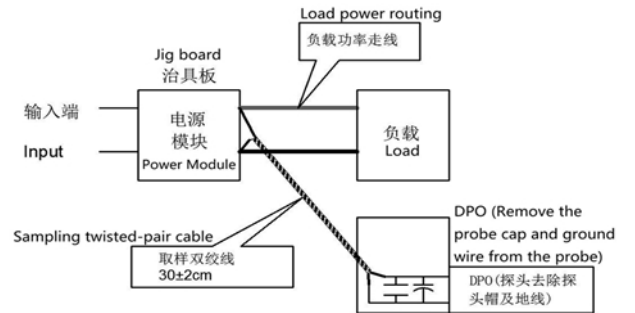

Product characteristic curve

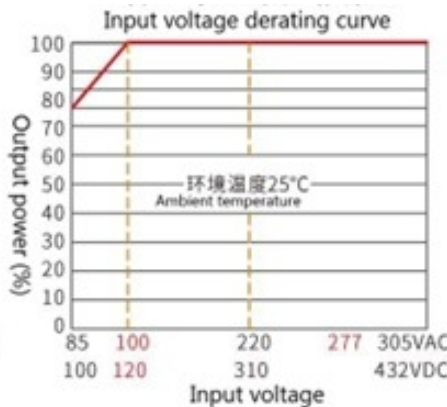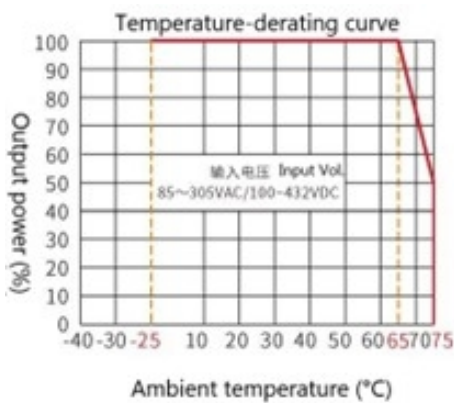

Note 1: When the input voltage is 85 - 100 VAC, derating must be performed based on the input voltage derating curve.

Note 2: This product is designed for use in naturally ventilated environments. Please contact us if you intend to use it in an enclosed environment.

Typical application circuit diagram and recommended parameters

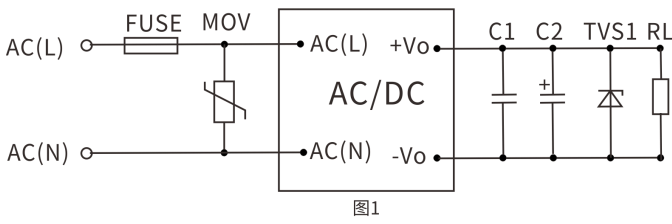


图1

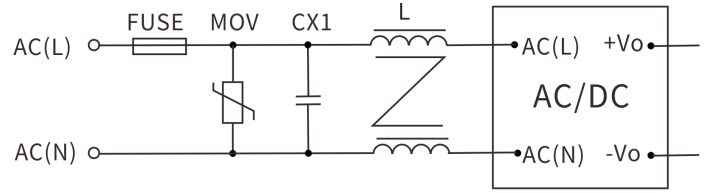


图2

For general applications, customers should use the circuit recommended in Figure 1;

If EMC requirements apply, please use the circuit recommended in Figure 2. The specific recommended values for Figure 2 are as follows:

- 1) Varistor (MOV): Recommended model: 14D-561K. Its function is to protect the module from damage during lightning surges.
- 2) Safety capacitors CY1 and CY2: 1000 pF/400 VAC;
- 3) Safety capacitor CX: 0.1  $\mu$ F/275 VAC;
- 4) Common-mode choke LCM: 20mH - 30mH;
- 5) FUSE (fuse): Mandatory; recommended rating: 2 A/250 V, slow-blow.

Note 1:

1. Output filter capacitor C1 is used to eliminate high-frequency noise. A 1  $\mu$ F ceramic capacitor is recommended, with a voltage rating derated by more than 80%.
2. Output filter capacitor C2 is an electrolytic capacitor. A high-frequency, low-impedance electrolytic capacitor with a capacity of 100  $\mu$ F and a current rating of 1A is recommended. The capacitor's voltage rating should be derated by more than 80%.
3. A TVS diode is recommended to protect the downstream circuitry (in case of module malfunction). Recommended 600W models: For 5V output, use SMBJ7.0A; for 9V output, use SMBJ12.0A; for 12V output, use SMBJ20A; for 15V output, use SMBJ20.0A; for 24V output, use SMBJ30.0A; for 48V output, use SMBJ64A
4. MOV stands for varistor. Recommended models: 10D561K (1000V surge) or 14D561K (2000V surge). Its function is to protect the module from damage during lightning surges.

Notes

1. The product must be used within its specified parameters; otherwise, it may be permanently damaged.
2. A fuse must be installed at the product's input terminal.
3. If the product operates below the minimum required load, we cannot guarantee that all performance specifications listed in this manual will be met;
4. If the product operates outside its rated load range, we cannot guarantee that all performance specifications listed in this manual will be met;
5. Unless otherwise specified, all data above was measured at Ta=25° C, humidity <75%, with nominal input voltage and rated output load (pure resistive load);
6. All test methods for the above specifications are based on our company's standards;
7. The above specifications apply to the product models listed in this manual. Certain specifications for non-standard models may exceed the requirements listed above; please contact our technical staff directly for details;
8. We offer product customization;
9. Product specifications are subject to change without notice; please refer to the latest version of the manual published on our official website.

Contact

GDHUIZHI®

广东汇智电子技术有限公司

[Guangdong Huizhi Electronic Technology Co., Ltd.](http://www.gdhuizhi.com)

地地址：广东省肇庆市端州区 11 区肇庆大道北侧厂房、办公楼(二期)3 楼

Address: 3rd floor, factory and office building (phase II) on the north side of Zhaoqing Avenue,  
District 11, Duanzhou District, Zhaoqing City, Guangdong Province, China

Homepage: [www.huizhi-elec.com](http://www.huizhi-elec.com)/[www.chinaebizal.com](http://www.chinaebizal.com)

Tel: +86 - 758 - 2566 585

E-mail: [sales@huizhi-elec.com](mailto:sales@huizhi-elec.com)