

Typical characteristics

- Wide range input: 85-305VAC/100-432VDC
- No-load power: 0.1W(Typ.)
- Conversion Efficiency: 90%(Typ.)
- Switching frequency: 65KHz
- Protection: output short circuit, overload
- Isolation voltage: 4000Vac
- Housing: plastic, compliant with UL94 V-0
- Plug-in mounting on the PCB board
- CE and RoHS compliant

20W, wide-input-voltage, isolated regulated single-output (S)/dual-output with common ground (D)/dual-output isolated (E), AC-DC power module




RoHS

*HAW20\_S-H2, HAW20\_D-H2, and HAW20\_E-H2 series are compact, high-efficiency module power supplies offered by Huizhi Electronics.*

*This series of power supplies offers a wide range of input voltages, AC/DC compatibility, low ripple, low temperature rise, low power consumption, high efficiency, high reliability, high-level safety isolation, and excellent EMC performance. These products are widely used in various fields, including power, industrial, instrumentation, and smart home applications. When using these products in environments with poor electromagnetic compatibility, please refer to the EMC application circuits provided by our company.*

Model Number Description

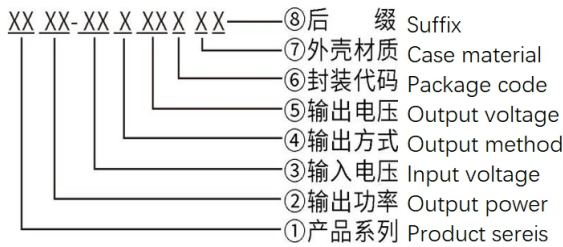

Product selection table

| Certification | Model number   | Output specifications |         |          |         |          | Maximum capacity sexual load | ripple and noise 20MHz (Max) | Efficiency @ full load, 220Vac (Typical) |
|---------------|----------------|-----------------------|---------|----------|---------|----------|------------------------------|------------------------------|--|
|               |                | Power                 | V. 1    | Io 1     | V. 2    | Io 2     |                              |                              |  |
|               |                | W                     | Vo1 (V) | Io1 (mA) | Vo2 (V) | Io2 (mA) |                              |                              |  |
|               | HAW20-220S03H2 | 20                    | 3.3     | 4000     | -       | -        | 4000                         | 80                           | 80                                       |
|               | HAW20-220S05H2 | 20                    | 5       | 4000     | -       | -        | 4000                         | 80                           | 85                                       |
|               | HAW20-220S09H2 | 20                    | 9       | 2222     | -       | -        | 2200                         | 80                           | 86                                       |
|               | HAW20-220S12H2 | 20                    | 12      | 1666     | -       | -        | 1000                         | 80                           | 88                                       |
|               | HAW20-220S15H2 | 20                    | 15      | 1333     | -       | -        | 1000                         | 80                           | 89                                       |
|               | HAW20-220S24H2 | 20                    | 24      | 833      | -       | -        | 470                          | 80                           | 90                                       |

|                  |    |     |      |     |      |           |    |    |
|------------------|----|-----|------|-----|------|-----------|----|----|
| HAW20-220S36H2   | 20 | 36  | 555  | -   | -    | 470       | 80 | 90 |
| HAW20-220S48H2   | 20 | 48  | 416  | -   | -    | 470       | 80 | 90 |
| HAW20-220D05H2   | 20 | +5  | 2000 | -5  | 2000 | 2200/2200 | 80 | 83 |
| HAW20-220D09H2   | 20 | +9  | 1111 | -9  | 1111 | 1000/1000 | 80 | 86 |
| HAW20-220D12H2   | 20 | +12 | 833  | -12 | 833  | 1000/1000 | 80 | 89 |
| HAW20-220D15H2   | 20 | +15 | 625  | -15 | 625  | 470/470   | 80 | 89 |
| HAW20-220D24H2   | 20 | +24 | 416  | -24 | 416  | 220/220   | 80 | 90 |
| HAW20-220E05H2   | 20 | +5  | 2000 | +5  | 2000 | 1000/1000 | 80 | 83 |
| HAW20-220E0512H2 | 20 | +5  | 2000 | +12 | 833  | 1000/1000 | 80 | 85 |
| HAW20-220E0524H2 | 20 | +5  | 2000 | +24 | 416  | 1000/1000 | 80 | 85 |
| HAW20-220E12H2   | 20 | +12 | 833  | +12 | 833  | 1000/1000 | 80 | 88 |
| HAW20-220E24H2   | 20 | +24 | 416  | +24 | 416  | 470/470   | 80 | 89 |

Note 1: Due to space limitations, the above is only a partial list of products. For products not included in the list, please contact our Sales Department.

Note 2: "\*" indicates models currently under development.

Note 3: Typical output efficiency values are based on measurements taken after the product has been aged under full load for 30 minutes.

Note 4: The full-load efficiency (% TYP) in the table has a tolerance of  $\pm 2\%$ . Full-load efficiency is calculated as the total output power divided by the module's input power.

### Input characteristics

| Items  | Working conditions | Minimum                      | Typical | Maximum | Unit |
|--|--------------------|------------------------------|---------|---------|------|
| Input voltage range                                | AC input           | 85                           | 220     | 305     | VAC  |
|  | DC input           | 100                          | 310     | 432     | VDC  |
| Input frequency range                              | -                  | 47                           | 50      | 63      | Hz   |
| Input current                                      | 115VAC             | /                            | /       | 0.60    | A    |
|  | 220VAC             | /                            | /       | 0.30    |      |
| Surge current                                      | 115VAC             | /                            | /       | 10      |      |
|  | 220VAC             | /                            | /       | 20      |      |
| Leakage current                                    | -                  | 0.5mA TYP/230VAC/50Hz        |         |         |      |
| External insurance management recommendation value | -                  | 2A-4A/250VAC slow-break fuse |         |         |      |
| Hot-swappable                                      | -                  | Not supported                |         |         |      |
| Remote control                                     | -                  | There is no remote control   |         |         |      |

### Output characteristics

| Items            | Working conditions                | Minimum | Typical | Maximum   | Unit      |   |
|------------------|-----------------------------------|---------|---------|-----------|-----------|---|
| Voltage accuracy | Input full voltage range Any load | Vo1     | -       | $\pm 1.0$ | $\pm 2.0$ | % |
|                  |                                   | Vo2     | -       | $\pm 3.0$ | $\pm 5.0$ | % |

|                           |  |   |              |     |              |   |
|---------------------------|--|---|--------------|-----|--------------|---|
| Linear regulation rate    | Rated load   | Vo1   | -            | -   | $\pm 0.5$    | % |
|                           |  | Vo2   | -            | -   | $\pm 1.5$    | % |
| Load regulation rate      | Input nominal voltage 20%~100% load  | Vo1   | -            | -   | $\pm 1.0$    | % |
|                           |  | Vo2   | -            | -   | $\pm 3.0$    | % |
| No-load power consumption | Input 115VAC   | -   | -            | 0.1 | W            |   |
|                           | Input 220VAC   | -   | -            |     |              |   |
| Minimum load              | Single output  | 0   | -            | -   | %            |   |
|                           | Positive and negative dual co-ground output  | 10 (balance load)   | -            | -   | %            |   |
|                           | Positive and negative dual isolated outputs  | 10 (balance load)   | -            | -   |              |   |
| Startup delay time        | Input Rated Voltage (Full Load)  | -   | 1000         | -   | mS           |   |
| Power down hold time      | Input 115VAC   | -   | 10           | -   | mS           |   |
|                           | Input 220VAC   | --  | 60           |     |              |   |
| Dynamic response          | 25%~50%~25%<br>50%~75%~50%   | Overshoot amplitude (%): $\leq \pm 5.0$                       |              |     | %            |   |
|                           |  | Recovery time (mS): $\leq 5.0$                                |              |     | mS           |   |
| Output overshoot          | Input full voltage range   | $\leq 10\%V_o$  |              |     | %            |   |
| Short-circuit protection  |  | It can be short-circuited for a long time and self-recovering |              |     | Barrier type |   |
| Drift coefficient         | -  | -   | $\pm 0.03\%$ | -   | %/°C         |   |
| Overcurrent protection    | Input full voltage range   | $\geq 150\% I_o$ is self-recoverable                          |              |     | Barrier type |   |
| Ripple Noise              | -  | -   | 50           | 80  | mV           |   |
|                           | Note: The test method for ripple and noise uses the twisted-pair test method. For specific test procedures and equipment requirements, please refer to the section below (Ripple & Noise Test Instructions). |   |              |     |              |   |

## General characteristics

| Items                 | Working conditions  | Minimum                      | Typical | Maximum | Unit |
|-----------------------|---|------------------------------|---------|---------|------|
| Switching frequency   | -   | -                            | 65      | -       | KHz  |
| Operating temperature | -   | -40                          | -       | +75     | °C   |
| Storage temperature   | -   | -40                          | -       | +85     |      |
| Soldering temperature | Wave soldering  | 260 $\pm$ 4°C, time: 5-10S   |         |         |      |
|                       | Hand soldering  | 360 $\pm$ 8°C, interval 4-7S |         |         |      |
| Relative humidity     | -   | 10                           | -       | 90      | %RH  |
| Isolation voltage     | Input-output, test for 1 minute, leakage current $\leq 5mA$ | 3750                         | -       | -       | VAC  |

|                                   |                             |                                   |   |    |
|-----------------------------------|-----------------------------|-----------------------------------|---|----|
| Insulation resistance             | Input-output @ apply DC500V | 100                               | - | MΩ |
| Safety standards                  | -                           | EN60950、IEC60950                  |   |    |
| Vibration                         | -                           | 10-55Hz, 10G, 30Min, alongX, Y, Z |   |    |
| Safety level                      | -                           | CLASS II                          |   |    |
| Enclosure grade                   | -                           | UL94V-0                           |   |    |
| Mean Time Between Failures (MTBF) | -                           | MIL-HDBK-217F@25°C >300,000H      |   |    |

EMC Electromagnetic Compatibility Characteristics

| Total Project | Sub-projects | Testing standards   | Judgment grade   |
|---------------|--------------|---|--|
| EMC           | EMI          | Conducted Emission  | CISPR22/EN55032 CLASS B                                  |
|               |              | Radiated Emission   | CISPR22/EN55032 CLASS B                                  |
|               | EMS          | Radiation Immunity  | IEC/EN61000-4-3 10V/m Perf. Criteria B                   |
|               |              | Conducted Susceptibility                                  | IEC/EN61000-4-6 3Vr. m. s Perf. Criteria B               |
|               |              | Electrostatic Discharge                                   | IEC/EN61000-4-2 Contact ±6KV / Air ±8KV Perf. Criteria B |
|               |              | Surge Immunity  | IEC/EN61000-4-5 ±1KV Perf. Criteria B                    |
|               |              | Electrical Fast Transient (EFT)                           | IEC/EN61000-4-4 ±2KV Perf. Criteria B                    |
|               |              | Immunity to Voltage Sag and Transient, Short Interruption | IEC/EN61000-4-11 0%~70% Perf. Criteria B                 |

Package Dimensions

底视图  
bottom view

侧视图  
lateral view

单位(Unit):mm  
印刷板俯视图 (Printed board vertical view)  
栅格间距(latic spacing):2.54mm(0.1inch)  
未标注尺寸公差±0.25mm  
未注明针脚直径公差±0.10mm

|              |                   |                       |
|--------------|-------------------|-----------------------|
| Package code | L x W x H         |                       |
| H2           | 70.0X48.0X23.5 mm | 2.756X1.890X0.925inch |

Pin Definition

| Pin                    | 1           | 2            | 3            | 4                   | 5                   | 6               | 7                   | 8                   |
|------------------------|-------------|--------------|--------------|---------------------|---------------------|-----------------|---------------------|---------------------|
| Single (S)             | FG          | AC (N)       | AC (L)       | +Vo                 | NP                  | NP              | NP                  | -Vo                 |
|                        | No function | Input - wire | Input + wire | Output + terminal   | Bare pin            | Bare pin        | Bare pin            | Output - terminal   |
| Dual common ground (D) | FG          | AC (N)       | AC (L)       | +Vo1                | NP                  | COM             | NP                  | -Vo2                |
|                        | No function | Input - wire | Input + wire | Output + terminal 1 | Bare pin            | Common terminal | Bare pin            | Output - terminal 2 |
| Dual isolation (E)     | FG          | AC (N)       | AC (L)       | +Vo2                | -Vo2                | NP              | +Vo1                | -Vo1                |
|                        | No function | Input - wire | Input + wire | Output + terminal 2 | Output - terminal 2 | Bare pin        | Output + terminal 1 | Output - terminal   |

Note: If the pin definitions of the power module differ from those in the selection guide, refer to the labels on the actual product.


Ripple & Noise Test Instructions (Twisted Pair Method, 20MHz Bandwidth)

Test Method:



1. For ripple and noise testing, use a Category 12 twisted-pair cable. Set the oscilloscope bandwidth to 20 MHz and use a 100 MHz bandwidth probe. Connect a 0.1 μF polypropylene capacitor and a 10 μF high-frequency, low-impedance electrolytic capacitor in parallel at the probe tip. Set the oscilloscope to “Sample” mode.

2. Output Ripple Noise Test Diagram:

Connect the power supply input to the input power source. Connect the power supply output to the electronic load via the fixture board. For testing, use a 30 cm ± 2 cm sampling lead to take a direct sample from the power supply output port. Select insulated wires with appropriate gauge based on the magnitude of the output current.

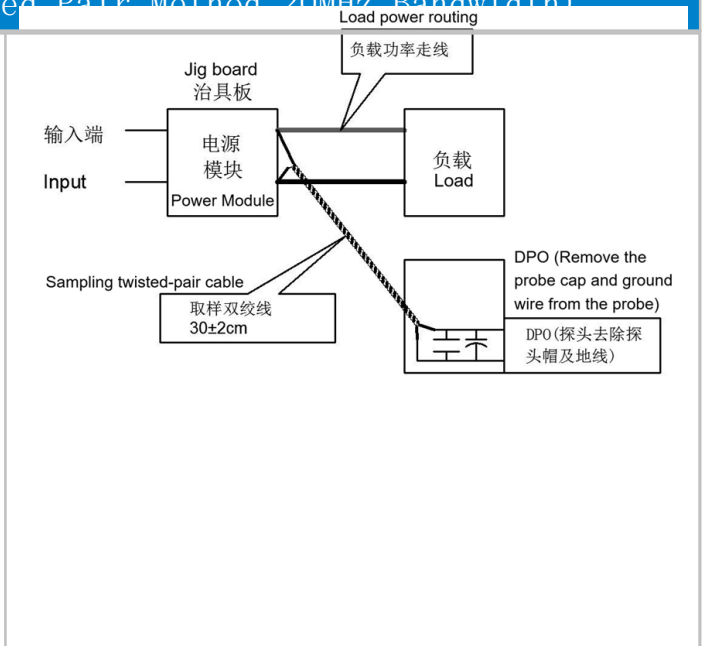

Product characteristic curve

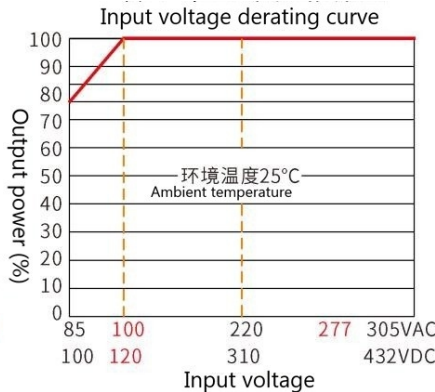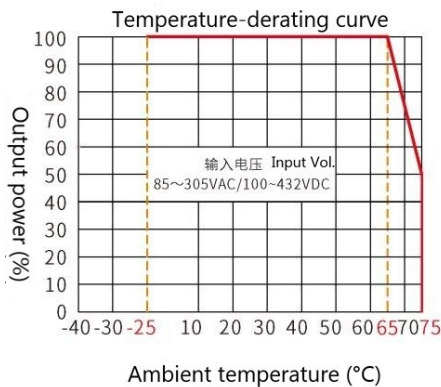

Note 1: The input voltage is 85 - 100 VAC. Voltage derating must be performed based on the input voltage derating curve.

Note 2: This product is designed for use in naturally ventilated environments. Please contact us if you intend to use it in an enclosed environment.

## Typical application circuit diagram and recommended parameters

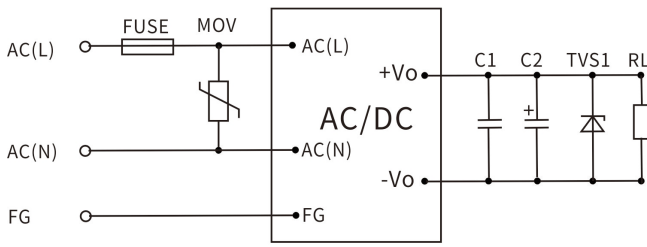


图1

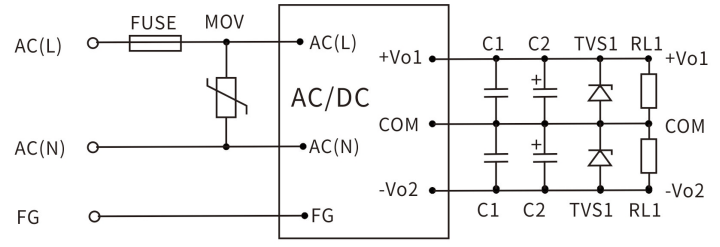


图2

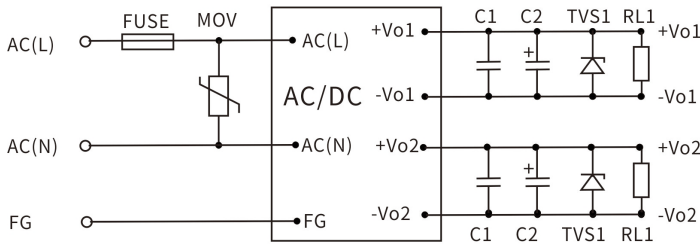


图3

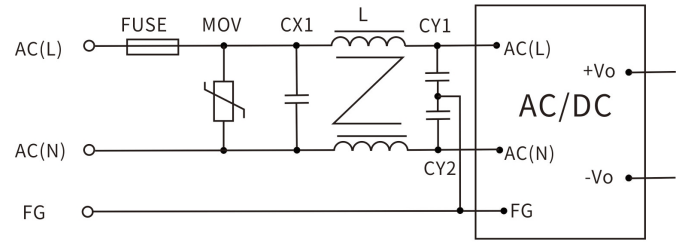


图4

## Note:

- The output filter capacitors C1 and C3 are used to eliminate high-frequency noise. We recommend using  $1\ \mu\text{F}$  ceramic capacitors with a voltage rating derated by more than 80%.
- The output filter capacitors C2 and C4 are electrolytic capacitors. We recommend using high-frequency, low-impedance electrolytic capacitors with a rating of  $100\ \mu\text{F}$  and 1A output current. The capacitors should have a voltage rating derated by more than 80%.
- TVS diodes are recommended to protect the downstream circuitry (in case of module malfunction). Recommended 600W models: For 5V output, use SMBJ7.0A; for 9V output, use SMBJ12.0A; for 12V output, use SMBJ20A; for 15V output, use SMBJ20.0A; for 24V output, use SMBJ30.0A; for 48V output, use SMBJ64A
- MOV stands for Metal Oxide Varistor. Recommended models: 10D561K (1000V surge) or 14D561K (2000V surge). Its function is to protect the module from damage during lightning surges.
- For general application requirements, customers should use the recommended circuits shown in Figures 1, 2, and 3. If higher EMC requirements are needed, please use the recommended circuit shown in Figure 4.
- The specific recommended values for Figure 4 are as follows:
  - Varistor (MOV): Recommended model: 14D-561K. Its function is to protect the module from damage during lightning surges.
  - Safety capacitors CY1 and CY2:  $1000\ \text{pF}/400\ \text{VAC}$ ;
  - Safety capacitors CY1 and CY2:  $1000\ \text{pF}/275\ \text{VAC}$ ;
  - Common-mode choke LCM:  $20\ \text{mH} - 30\ \text{mH}$ ;
  - FUSE (fuse): Mandatory; recommended rating:  $3.15\ \text{A}/250\ \text{V}$ , slow-blow (if the fuse rating is too low, it may be damaged during a surge; if too high, it loses its protective function).

## Notes

1. The product must be used within the specified parameters; otherwise, it may be permanently damaged.
2. A fuse must be installed at the product's input terminal.
3. If the product operates below the minimum required load, we cannot guarantee that all performance specifications listed in this manual will be met;
4. If the product operates outside its rated load range, we cannot guarantee that all performance specifications listed in this manual will be met;
5. Unless otherwise specified, all data above was measured at  $T_a=25^{\circ}\text{C}$ , humidity  $<75\%$ , with nominal input voltage and rated output load (pure resistive load);
6. All test methods for the above specifications are based on our company's standards;
7. The specifications listed above apply to the product models specified in this manual. Certain specifications for non-standard models may exceed the requirements stated above; please contact our technical staff directly for details;
8. We offer product customization;
9. Product specifications are subject to change without notice; please refer to the latest version of the manual published on our official website.

## Contact

# GDHUIZHI®

## 广东汇智电子技术有限公司

[Guangdong Huizhi Electronic Technology Co., Ltd.](http://www.huizhi-elec.com)

地址：广东省肇庆市端州区11区肇庆大道北侧厂房、办公楼(二期)3楼

Address: 3rd floor, factory and office building (phase II) on the north side of Zhaoqing Avenue,  
District 11, Duanzhou District, Zhaoqing City, Guangdong Province, China

Homepage: [www.huizhi-elec.com](http://www.huizhi-elec.com)/[www.chinaebizal.com](http://www.chinaebizal.com)

Tel: +86 - 758 - 2566 585

E-mail: [sales@huizhi-elec.com](mailto:sales@huizhi-elec.com)