

Typical Characteristics

- Fixed-voltage input, isolated unregulated output, 2W power
- Isolation voltage: 1500VDC
- Low no-load power consumption: 0.025W(Typ.)
- Efficiency: up to 90% (Typ.)
- Working ambient temperature: -40℃~+85℃
- MTBF≥3.5 million hours (3500000Hrs)
- Output short-circuit protection: continuous short-circuit protection, automatic recovery
- Compact SIP package, plastic housing
- Industry standard pin-out
- Ripple/noise (20MHz bandwidth):30mVp-p(Typ.)

2W, fixed-voltage input, isolated unregulated, single-output DC/DC power module




Over-temperature protection and continuous output short-circuit protection
RoHS

B_S-2WR3 Series is a compact, high-efficiency, low-power, fixed-voltage input, isolated, unregulated single-output DC/DC module power supply designed by Huizhi Electronics for its customers.

This product series is specifically designed for applications in board-level power supply systems that require the generation of a voltage isolated from the input power supply. This product is suitable for:

- The input voltage is relatively stable (voltage variation range: $\pm 10\%$ of V_{in});
- Isolation between input and output is required (isolation voltage ≤ 1500 VDC);
- Output voltage stability requirements are not stringent;
- Typical applications: purely digital circuits, general low-frequency analog circuits, relay driver circuits, data switching circuits, etc.

Model Number Description

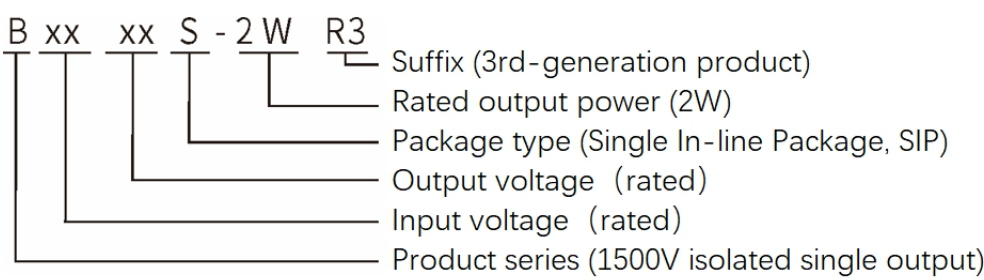

Product selection table

Cer tif ica tio n	Model number	Input voltage range (Vdc)	Output Voltage/Current		Ripple and Noise	Efficiency@ Full load	Max. capaci tive load
		Rated value ^② (Range)	Output V (Vdc)	Output I (mA) (Max. Min.)	Full Load (mVp-p) Typ. /Max.	%, (Min. /Typ.)	μ F

	B0503S-2WR3	5 (4.5~5.5)	3.3	400/40	50/100	74/78	2400
	B0505S-2WR3		5	400/40	50/100	80/84	2400
	B0509S-2WR3		9	278/28	50/100	80/84	1000
	B0512S-2WR3		12	222/22	50/100	81/85	560
	B0515S-2WR3		15	167/17	50/100	81/85	560
	B0524S-2WR3		24	133/13	50/100	82/86	220
	B0903S-2WR3	9 (8.1~9.9)	3.3	606/60	50/100	80/83	2400
	B0905S-2WR3		5	400/40	50/100	85/88	2400
	B0909S-2WR3		9	222/23	50/100	86/88	1000
	B0912S-2WR3		12	166/17	50/100	87/89	560
	B0915S-2WR3		15	133/13	50/100	87/89	560
	B0924S-2WR3		24	83/8	50/100	87/89	220
	B1203S-2WR3	12 (10.8~13.2)	3.3	400/40	50/100	75/79	2400
	B1205S-2WR3		5	400/40	50/100	78/82	2400
	B1209S-2WR3		9	222/22	50/100	78/82	1000
	B1212S-2WR3		12	167/17	50/100	80/84	560
	B1215S-2WR3		15	133/13	50/100	81/85	560
	B1224S-2WR3		24	83/8	50/100	82/86	220
	B1503S-2WR3	15 (13.5~16.5)	3.3	606/60	50/100	81/84	2400
	B1505S-2WR3		5	400/40	50/100	76/80	2400
	B1509S-2WR3		9	222/23	50/100	87/89	1000
	B1512S-2WR3		12	166/17	50/100	88/90	560
	B1515S-2WR3		15	133/13	50/100	77/81	560
	B1524S-2WR3		24	83/8	50/100	77/81	220
	B2403S-2WR3	24 (21.6~26.4)	3.3	400/40	50/100	70/76	2400
	B2405S-2WR3		5	400/40	50/100	74/80	2400
	B2409S-2WR3		9	222/22	50/100	75/81	1000
	B2412S-2WR3		12	167/17	50/100	78/84	560
	B2415S-2WR3		15	133/13	50/100	80/86	560
	B2424S-2WR3		24	83/8	50/100	80/86	220

Note:

1. Due to space limitations, the above is only a list of representative products. For products not included in this list, please contact our Sales Department.

2. The maximum capacitive load indicates the maximum capacitive load that can be connected to +Vo or -Vo. If this value is exceeded, the product will not start properly.

Test Conditions: Unless otherwise specified, all parameter measurements were taken at the nominal input voltage, with a purely resistive rated load, and at an ambient temperature of 25° C.

Input characteristics

Items	Working conditions		Min.	Typ.	Max.	Unit
Input Current (Full Load/No Load)	5VDC input series	3.3VDC output	--	534/8	564/--	mA
		5VDC/7.2VDC output	--	477/8	500/--	
		9VDC/12VDC output	--	471/8	494/--	
		15VDC/24VDC output	--	466/8	488/--	
	9VDC input series		--	250/5	--/10	
	12VDC input series	3.3VDC output	--	223/8	235/--	
		5VDC/7.2VDC output	--	208/8	219/--	
		9VDC output	--	203/8	214/--	
		12VDC/15VDC/24VDCout put	--	201/8	211/--	
	15VDC input series	5VDC output	--	167/8	176/--	
		15VDC output	--	163/8	171/--	
		24VDC output	--	165/8	173/--	
	24VDC input series	3.3VDC output	--	110/8	120/--	
		5VDC/7.2VDC output	--	104/8	112/--	
		9VDC output	--	103/8	111/--	
		12VDC/15VDC/24VDC output	--	101/8	108/--	
Reflected ripple current			--	15	--	
Impulse voltage (I sec. max)	3.3VDC input series		-0.7	--	5	VDC
	5VDC input series		-0.7	--	9	
	9VDC input series		-0.7	--	15	
	12VDC input series		-0.7	--	18	
	15VDC input series		-0.7	--	21	
	24VDC input series		-0.7	--	30	
Input filter type			Capacitor filtering			
Hot swap			Not supported			


Output characteristics

Items	Working and test conditions		Min.	Typ.	Max.	Unit
Output load	Load percentage		10	--	100	%
Output voltage	See the error envelope curve		--	--	±15.0	%
Line Regulation	Input voltage variation: ±1%	3.3V output	--	--	±1.5	%
		Others	--	--	±1.2	%
Load Regulation	10%~100% load	5VDC input	3.3VDC output	--	10	%
			5VDC/7.2VDC output	--	8	
					15	

			9VDC/12VDC/15VDC output	--	7	10	
			24VDC output	--	5	10	
		12/15/24VDC input	3.3VDC output	--	15	20	
			5VDC output	--	7	15	
			9VDC output	--	6	15	
			12VDC output	--	5	15	
			15VDC output	--	5	10	
			24VDC output	--	4	10	
Ripple & Noise	Pure resistive load, 20 MHz bandwidth, peak-to-peak value			--	50	100	mVp-p
Temperature drift coefficient	Full load			--	±0.02	--	%/° C
Output short-circuit protection	Sustainable short-circuit protection, automatic recovery						
Note: ① Test method for ripple and noise: twisted-pair test method.							

General characteristics						
Items	Working conditions		Min.	Typ.	Max.	Unit
Insulation voltage	Input-output, test duration: 1 minute, leakage current less than 1 mA.		1500	--	--	VDC
Insulation resistance	Input-output, insulation voltage 500 VDC.		1000	--	--	MΩ
Isolation capacitor	Input-Output, 100 kHz/0.1 V		--	40	--	pF
Operating temperature	Use the reference temperature derating curve		-40	--	+85	℃
Storage temperature			-40	--	+125	
Maximum operating case temperature			--	25	--	
Storage humidity	No condensation		5	--	95	%RH
Pin soldering temperature resistance	The solder joint is 1.5 mm from the housing; 10 seconds		--	--	+300	℃
Switching frequency	Full load, rated voltage input		--	100	--	KHz
Vibration			10-55Hz, 10G, 30 Min. along X, Y and Z			
Housing material			Black flame-retardant, heat-resistant plastic (UL94 V-0)			
Minimum mean time between failures	MIL-HDBK-217F@25℃		3.5X10 ⁶	--	--	Hrs

Product Performance Curve

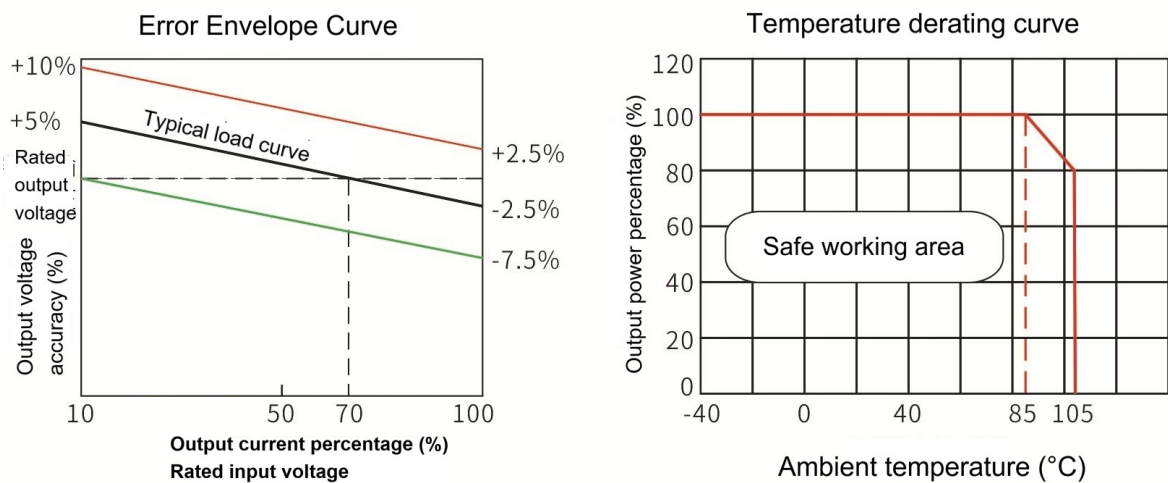


Typical Application Reference Circuit (Recommended Parameters)

1. General applications:

If further reduction of input and output ripple is required, a capacitive filter network can be connected to the input and output terminals; the application circuit is shown in Figure 1.


However, care must be taken to select an appropriate filter capacitor. If the capacitor is too large, it is likely to cause startup issues. For each output channel, the recommended capacitive load values—while ensuring safe and reliable operation—are detailed in Table 1.

Recommended capacitive load values (Table 1)

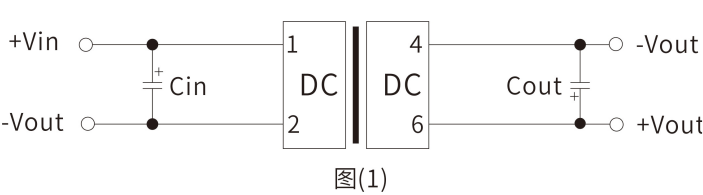

Vin (Vdc)	Cin (u F)	Vo (Vdc)	Cout (u F)
3.3/5	4.7	3.3/5	10
12	2.2	9	4.7
15	2.2	12	2.2
24	1	15	1
-	-	24	0.47

2. Typical EMI application circuits

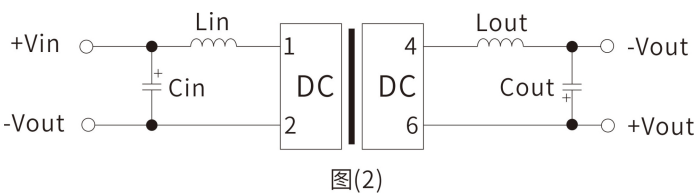

Recommended EMI reference circuit values (Table 2)

Vin (Vdc)	3.3/5/12/15/24
Cin	4.7u F/50V
Cout	参考表1
Lin	4.7uH
Lout	4.7uH

3. Output load requirements

To ensure that this module operates efficiently and reliably, the minimum output load must not be less than 10% of the rated load during use. If your power requirement is indeed lower, please connect a resistor in parallel between the positive and negative terminals of the output (the total power rating of the resistor must be greater than or equal to 10% of the rated power, and the selected resistor's power rating must be at least 5 times greater than the actual power consumption; otherwise, the resistor may overheat).

Appearance Dimensions and Pin Descriptions, Recommended PCB Layout

1) Appearance Dimensions (Unit: mm; Tol.: xx ±0.25)

Front view

Side view

Print side

Bottom view

2) Pin Descriptions

1	2	3	4	5	6
+Vin	-Vin	No Pin	-Vout	No Pin	+Vout
输入正	输入负	空脚	输出负	空脚	输出正

3) Recommended layout

Remarks: grid distance: 2.54*2.54mm

*Note: If the pin assignments of the power module differ from those in the selection guide, refer to the labels on the actual unit.

Package Description

Package code	L x W x H	
S	19.5 x 7.0x 10.0 mm	0.768 × 0.276 ×0.394inch

Test Application Reference

Ripple & Noise Testing: (Twisted-pair method, 20 MHz bandwidth)

Test Method:

1. For ripple and noise testing, use a Category 12 twisted-pair cable. Set the oscilloscope bandwidth to 20 MHz and use a 100 MHz bandwidth probe. Connect a 0.1 μF polypropylene capacitor and a 4.7 μF high-frequency, low-impedance electrolytic capacitor in parallel at the probe tip. Set the oscilloscope to “Sample” mode.

2. Schematic Diagram for Output Ripple and Noise Testing:

Connect the power supply input to the input power source. Connect the power supply output to the electronic load via the fixture board. For testing, use a 30 cm ± 2 cm sampling lead to take a direct sample from the power supply output port. Select insulated wires with appropriate gauge based on the magnitude of the output current.

Input端
Input

Jig board
治具板

电源模块
Power Module

负载功率走线
Load power routing

负载
Load

Sampling twisted-pair cable
取样双绞线 30±2cm

DPO (Remove the probe cap and ground wire from the probe)
DPO (探头去除探头帽及地线)

Application Precautions

1. Input Requirements: Ensure that the output voltage fluctuation range of the power supply does not exceed the input requirements of the DC/DC module itself; the output power of the input power supply must be greater than the output power of the DC/DC module.
2. Recommended Circuit 1: For applications with general ripple and noise requirements, a filter capacitor can be connected in parallel at both the input and output terminals. The external circuit is shown in Figure (1) below; refer to Table (1). Output Load Requirements: Avoid operating under no-load conditions whenever possible. When the actual power consumption of the load is less than 10% of the module's rated output power or no-load conditions occur, it is recommended to connect a dummy load to the output. The dummy load (resistor) can be calculated based on 5-10% of the module's rated power, where the resistance value = $U_{out} / (1W \times R3 \times 10\%)$;
3. Overload Protection: Under normal operating conditions, the product's output circuit does not provide overload protection. Prolonged overload will trigger over-temperature protection, causing the output to shut down;
4. The output features continuous short-circuit protection with automatic recovery.
5. The capacitance of the external capacitor connected to the output should not be too large, as this may cause overcurrent or poor startup during module startup;
6. If the product operates below the minimum required load, performance compliance with all specifications in this manual cannot be guaranteed;
7. Maximum capacitive loads are tested within the input voltage range and under full-load conditions;
8. Unless otherwise specified, all specifications in this manual are measured at $T_a=25^{\circ}C$, humidity $<75\%RH$, nominal input voltage, and rated output load;
9. All test methods for the specifications in this manual are based on our company's standards;
10. We offer product customization; please contact our technical staff directly for details;
11. Product specifications are subject to change without notice.

Contact

GDHUIZHI®

广东汇智电子科技有限公司

Guangdong Huizhi Electronic Technology Co., Ltd.

地址：广东省肇庆市端州区 11 区肇庆大道北侧厂房、办公楼(二期)3 楼

Add.: 3rd floor, factory and office building (phase II) on the north side of Zhaoqing Avenue,
District 11, Duanzhou District, Zhaoqing City, Guangdong Province, China

Homepage: www.huizhi-elec.com/www.chinaebizal.com

Tel: +86 - 758 - 2566 585

E-mail: sales@huizhi-elec.com