

Typical Characteristics

10W, ultra-wide voltage input, isolated regulated

- Wide input range (4:1), Output: dual/ single output, DIP package, DC/DC power module 10W
- Conversion efficiency: 91%(Typ.)
- Isolation voltage: 1500Vdc
- Ultra-low standby power consumption: 0.036W(Typ.)
- Ultra-fast startup: 1ms (Typ.)
- Working temperature: -40℃~+85℃
- Protection: input undervoltage, output short-circuit, overcurrent
- Metal housing, low output ripple



RoHS

URB_YMD-10WR3 and URA_YMD-10WR3 series products deliver 10W of output power, feature a 4:1 wide input voltage range, and achieve up to 91% efficiency. a standard isolation voltage of 1500 VDC, an operating temperature range of -40° C to +85° C, and features such as input undervoltage protection, overcurrent protection, and short-circuit protection. The bare unit complies with CISPR 32/EN 55032 Class A and is widely used in medical, industrial control, power, instrumentation, communications, and railway applications.

Model Number Description

UR	x	xx	xx	YMD - 10W	R3	
						Suffix (3rd-generation product)
						Rated output power (10W)
						Package type (25.4 x 25.4 mm)
						Output voltage (rated)
						Input voltage (rated)
						No. of output (B: single, A: dual, 1500 Vdc isolation)
						Product series (UR indicates 4:1 input)

Product selection table

Certification	Model number	Input voltage range (Vdc)		Output Voltage/Current		Ripple and Noise	Maximum capacitive load ^②	Efficiency @ Full load
		Rated ^② (range)	Max ^③	Output V (Vdc)	Output I (mA) (Max. Min.)	Full load (mVp-p) (Typ. /Max.)	μ F (Max.)	% Min. /Typ.
	URB2403YMD-10WR3	24 (9-36)	40	3.3	2400/0	30/50	2200	75/77
	URB2405YMD-10WR3			5	2000/0	30/50	2200	80/82
	URB2412YMD-10WR3			12	833/0	50/80	470	84/86
	URB2415YMD-10WR3			15	667/0	50/80	330	84/86

URB2424YMD-10WR3			24	416/0	50/80	100	86/88
URA2405YMD-10WR3			±5	±1000/0	30/50	1000	81/83
URA2412YMD-10WR3			±12	±416/0	50/80	470	85/87
URA2415YMD-10WR3			±15	±333/0	50/80	330	85/87
URA2424YMD-10WR3			±24	±208/0	50/80	100	85/87
URB4803YMD-10WR3	48 (18-75)	80	3.3	2400/0	30/50	2200	77/79
URB4805YMD-10WR3			5	2000/0	30/50	2200	81/83
URB4812YMD-10WR3			12	833/0	50/80	470	85/87
URB4815YMD-10WR3			15	667/0	50/80	330	85/87
URB4824YMD-10WR3			24	416/0	50/80	100	86/88
URA4805YMD-10WR3			±5	±1000/0	30/50	1000	81/83
URA4812YMD-10WR3			±12	±416/0	50/80	470	85/87
URA4815YMD-10WR3			±15	±333/0	50/80	330	85/87
URA4824YMD-10WR3			±24	±208/0	50/80	100	85/87
URB1D03YMD-10WR3	110 (40-160)	180	3.3	2400/0	30/50	2500	80/82
URB1D05YMD-10WR3			5	2000/0	30/50	2200	83/85
URB1D12YMD-10WR3			12	833/0	50/80	680	86/88
URB1D15YMD-10WR3			15	666/0	50/80	470	86/88
URB1D24YMD-10WR3			24	416/0	50/80	220	86/88
URA1D05YMD-10WR3			±5	±1000/0	30/50	1100	83/85
URA1D12YMD-10WR3			±12	±416/0	50/80	330	86/88
URA1D15YMD-10WR3			±15	±333/0	50/80	220	86/88
URA1D24YMD-10WR3			±24	±208/0	50/80	100	86/88

Note: 1. Due to space limitations, the above is only a list of representative products. For products not included in this list, please contact our Sales Department.

2. The maximum capacitive load indicates the maximum capacitive load that can be connected to +Vo or -Vo; if this value is exceeded, the product will not start properly.

3. Exceeding the maximum input voltage may cause permanent damage to the product.

Test Conditions: Unless otherwise specified, all parameter measurements were taken at the rated input voltage, with a purely resistive rated load, and at an ambient temperature of 25° C.

Input characteristics

Items	Working conditions		Min.	Typ.	Max.	Unit
Input Current (Full Load/No Load)	24VDC rated input series, rated input voltage	3.3V	—	429/5	440/12	mA
		Others	—	502/5	521/12	
	48VDC rated input series, rated input voltage	3.3V	—	190/4	215/8	
		Others	—	251/4	258/8	
	110VDC rated input series, rated input voltage	3.3V	—	87/0.3	90/0.5	
		Others	—	100/0.3	109/0.5	
Reflected ripple current	24VDC rated input series, rated input voltage		—	40	—	mA
	48VDC rated input series, rated input voltage		—	30	—	
	110VDC rated input series, rated input voltage		—	20	—	
Impulse voltage	24VDC rated input series, rated input voltage		-0.7	—	50	VDC

	48VDC rated input series, rated input voltage	-0.7	-	100	
	110VDC rated input series, rated input voltage	-0.7	-	200	
	24VDC rated input series, rated input voltage	-	-	9	
Startup voltage	48VDC rated input series, rated input voltage	-	-	18	
	110VDC rated input series, rated input voltage	-	-	40	
Input undervoltage protection	24VDC rated input series, rated input voltage	5.5	6.5	-	
	48VDC rated input series, rated input voltage	12	15.5	-	
	110VDC rated input series, rated input voltage	32	36	-	
Startup time	Rated input voltage and constant-resistance load	-	10	-	mS
Input filter type		PI type			
Hot swap	-	Not supported			
Remote control (Ctrl) *	Module on	Ctrl floating or connected to a TTL high level (3.5-12VDC)			
	Module off	Connect Ctrl to GND or a low level (0-1.2VDC)			
	Input current while turn-off	-	6	10	mA

Note: *The voltage on the Ctrl pin is relative to the input pin GND.

Output characteristics

Items	Working and test conditions	+Vo1			-Vo2		
		Min.	Typ.	Max.	Min.	Typ.	Max.
Output load	Load percentage	0%	-	100%	0%	-	100%
Output voltage accuracy		-	±1.0%	±2.0%	-	±2.0%	±3.0%
Line Regulation	Input voltage range	-	±0.2%	±0.5%	-	±1.5%	±2%
Load Regulation	20% to 100% rated load, balanced load	-	±0.5%	±1%	-	±4.0%	±5.0%
Ripple & Noise	Pure resistive load, 20 MHz bandwidth, peak-to-peak value	-	50mVp-p	80mVp-p	-	50mVp-p	80mVp-p
Startup delay		-	1ms	-	-	1ms	-
Output voltage adjustment	Input voltage range	-	Non-adjustable	-	-	Non-adjustable	-
Dynamic response to a step disturbance	25% of the rated load step	-	±3.0%	±5.0%	-	±3.0%	±5.0%
Dynamic response recovery time		-	300 μs	500 μs	-	300 μs	500 μs


Output overcurrent protection	Full voltage range input	110% Io	150% Io	200% Io			
Output short-circuit protection	Full voltage range input	Sustainable, self-recovering					

Note: ① For product models with output voltages of ± 5 VDC and ± 9 VDC, the maximum output voltage accuracy under 0% - 5% load conditions is $\pm 5\%$;
② When tested under 0% - 5% load conditions, the load regulation is $\pm 5\%$;
③ The load ripple and noise at 0% - 5% load is less than or equal to 5% of V_o . The test method for ripple and noise is the twisted-pair test; a capacitive load can be applied to the output to reduce light-load ripple.


General characteristics

Items	Working conditions	Min.	Typ.	Max.	Unit
Insulation voltage	Input-output, test duration: 1 minute, leakage current less than 1 mA.	1500	--	--	VDC
Insulation resistance	Input-output, insulation voltage 500 VDC.	1000	--	--	MΩ
Isolation capacitor	Input-Output, 100 kHz/0.1 V	--	1000	--	pF
Working temperature	Use the reference temperature derating curve	-40	--	+85	℃
Storage temperature		-40	--	+125	
Maximum operating case temperature		--	--	+100	
Storage humidity	No condensation	5	--	95	%RH
Pin soldering temperature resistance	The solder joint is 1.5 mm from the housing; 10 seconds	--	--	+300	℃
Switching frequency	PWM mode	--	250	--	KHz
Vibration		10-55Hz, 10G, 30 Min. along X, Y and Z			
Housing material		Aluminum alloy housing with plastic bottom cover			
Minimum mean time between failures	MIL-HDBK-217F@25℃	--	2X10 ⁵	--	Hrs

Temperature Characteristic Curve

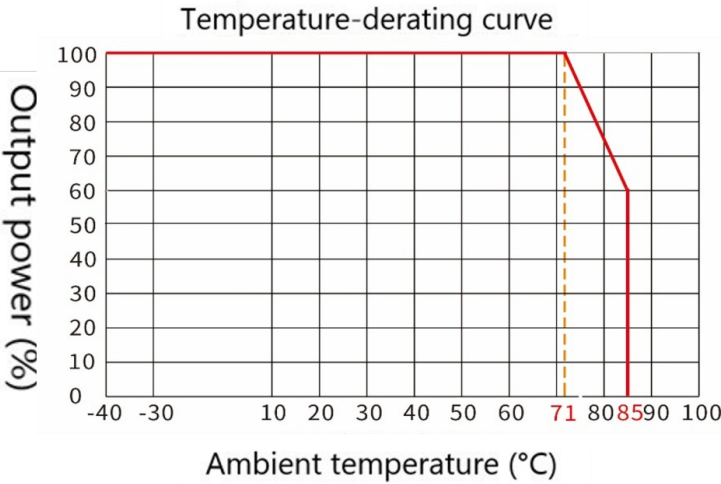


EMC Peripheral Recommended Circuit

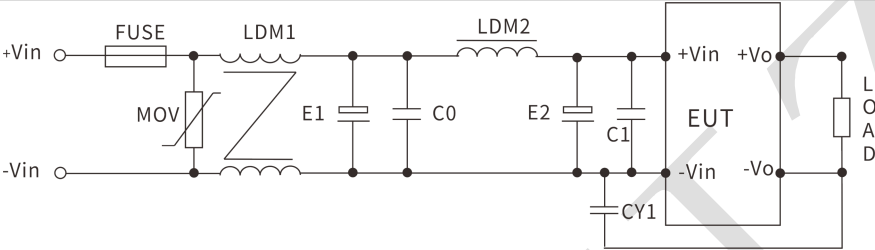

Recommended parameters: The following are typical settings; please adjust them accordingly based on your specific operating environment.

Component code	24V Input	48V Input	110V Input
FMSE fuse	Connect the appropriate fuse based on customer requirements		
MOV varistor	14D560K	14D101K	14D201K
LDM1 common-mode inductor	10 mH	15 mH	30 mH
E1、E2 electrolytic capacitor	100 μ F/50V	100 μ F/100V	63 μ F/200V
C0、D1 ceramic capacitor	1 μ F/50V	1 μ F/100V	0.47 μ F/250V
LDM2 common-mode inductor	10 μ H	15 μ H	68 μ H
CY1 safety Y2 capacitors	1nF/250Vac		

Recommended Peripheral Circuit for Output Filtering

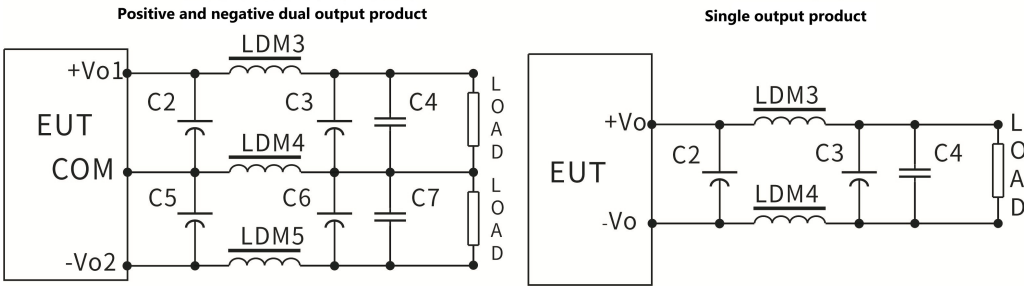


Package Description

Package code	L x W x H	
YMD	25.4 X25.4X11.0mm	1.000X 1.000 X0.433 inch

Test Application Reference

Recommended Test Circuit 1、DC/DC Test Circuit:
Recommended capacitors: C1: 47-100 μ F; C2、C3: 10-22 μ F 。

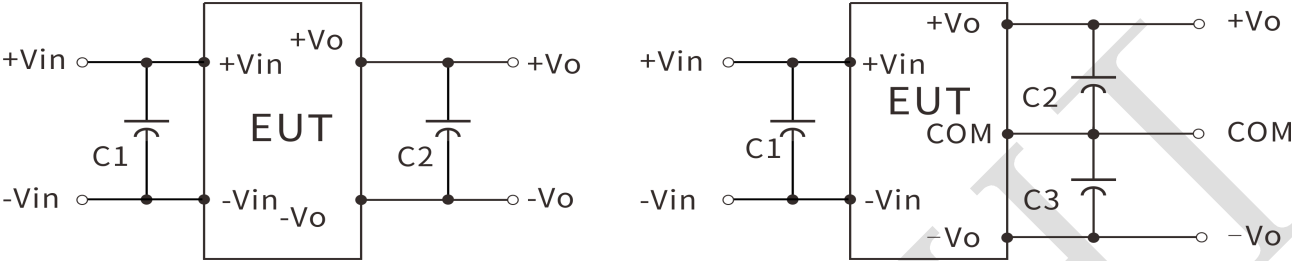


2. Ripple & Noise Testing: (Twisted-pair Method, 20 MHz Bandwidth)

Test Method:

1. For ripple and noise testing, use a Category 12 twisted-pair cable. Set the oscilloscope bandwidth to 20 MHz and use a 100 MHz bandwidth probe. Connect a 0.1 μ F polypropylene capacitor and a 47 μ F high-frequency, low-impedance electrolytic capacitor in parallel at the probe tip. Set the oscilloscope to “Sample” mode.
2. Schematic diagram for output ripple and noise testing:

Connect the power supply input to the input power source. Connect the power supply output to the electronic load via the fixture board. For testing, use a 30 cm $\pm$ 2 cm sampling lead to take a direct sample from the power supply output port. Select insulated wires with appropriate gauge based on the magnitude of the output current.

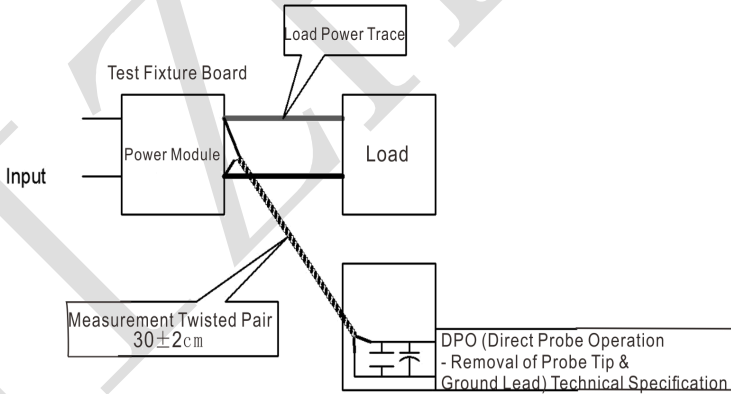

Contact

GDHUIZHI®
广东汇智电子技术有限公司

Guangdong Huizhi Electronic Technology Co.,Ltd.

地址：广东省肇庆市端州区 11 区肇庆大道北侧厂房、办公楼(二期)3 楼

Add.: 3rd floor, factory and office building (phase II) on the north side of Zhaoqing Avenue,
District 11, Duanzhou District, Zhaoqing City, Guangdong Province, China

Homepage: www.huizhi-elec.com/www.chinaebizal.com

Tel: +86 -758 - 2566585

E-mail: sales@huizhi-elec.com